
Section 36. Configurable Logic Cell

HIGHLIGHTS

This section of the manual contains the following major topics:

36.1	Introduction	36-2
36.2	Registers	36-5
36.3	CLC Setup	36-12
36.4	Input Providers	36-13
36.5	Output	36-15
36.6	Application Logic	36-15
36.7	CLC Interrupts	36-15
36.8	Operation in Sleep Mode	36-16
36.9	Operation in Idle Mode	36-16
36.10	Reset	36-16
36.11	Related Application Notes	36-17
36.12	Revision History	36-18

Note: This family reference manual section is meant to serve as a complement to device data sheets. Depending on the device variant, this manual section may not apply to all PIC32 devices.

Please consult the note at the beginning of the “**Configurable Logic Cell (CLC)**” chapter in the current device data sheet to check whether this document supports the device you are using.

Device data sheets and family reference manual sections are available for download from the Microchip Worldwide Web site at: <http://www.microchip.com>

36.1 INTRODUCTION

The Configurable Logic Cell (CLC) module allows the user to specify combinations of signals as inputs to a logic function, and to use the logic output to control other peripherals or I/O pins. This provides greater flexibility and potential in embedded designs, since the CLC module can operate outside the limitations of software execution, and supports a vast amount of output designs.

Each of the four independent input provider gates can execute a simple function of application defined inputs to produce a logic function input. A typical input selector configuration, as shown in Figure 36-1, has four inputs selected from a pool of 32 signals.

Figure 36-1: Configurable Logic Cell

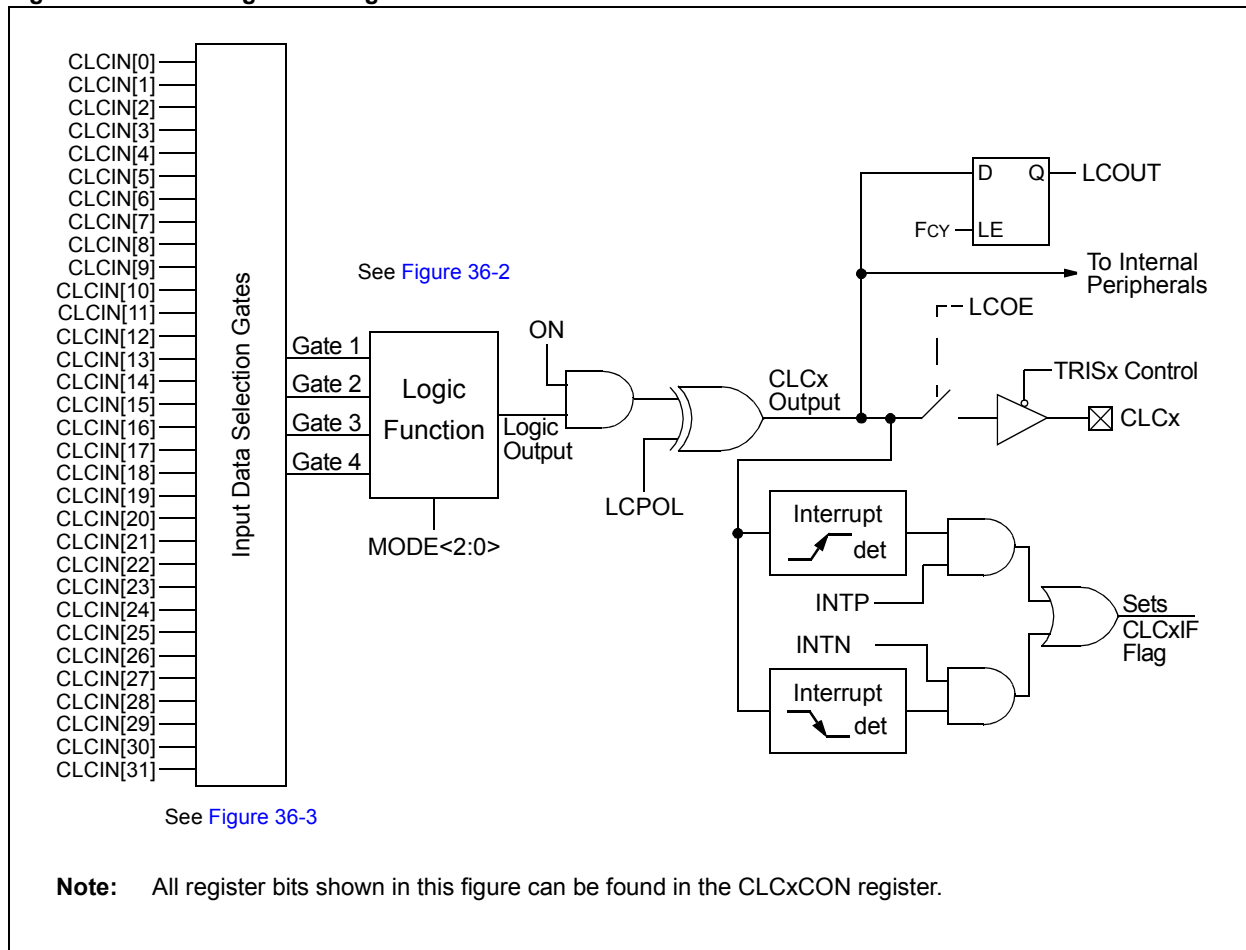


Figure 36-2: Logic Function Combinatorial Options









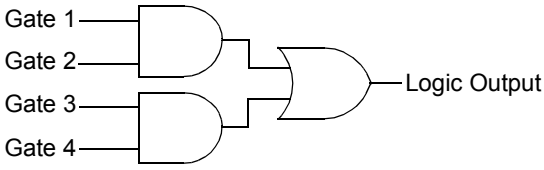
<p style="text-align: center;">AND – OR</p>  <p style="text-align: center;">MODE<2:0> = 000</p>	<p style="text-align: center;">OR – XOR</p>  <p style="text-align: center;">MODE<2:0> = 001</p>
<p style="text-align: center;">4-Input AND</p>  <p style="text-align: center;">MODE<2:0> = 010</p>	<p style="text-align: center;">S-R Latch</p>  <p style="text-align: center;">MODE<2:0> = 011</p>
<p style="text-align: center;">1-Input D Flip-Flop with S and R</p>  <p style="text-align: center;">MODE<2:0> = 100</p>	<p style="text-align: center;">2-Input D Flip-Flop with R</p>  <p style="text-align: center;">MODE<2:0> = 101</p>
<p style="text-align: center;">J-K Flip-Flop with R</p>  <p style="text-align: center;">MODE<2:0> = 110</p>	<p style="text-align: center;">1-Input Transparent Latch with S and R</p>  <p style="text-align: center;">MODE<2:0> = 111</p>

Figure 36-3: CLC Input Source Selection Diagram

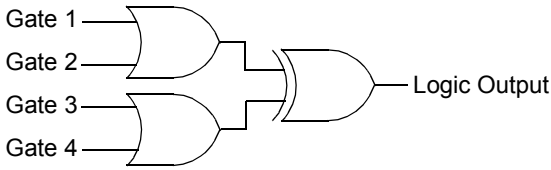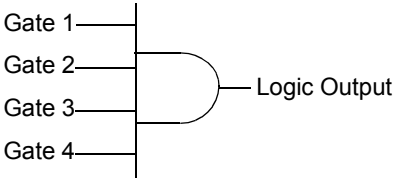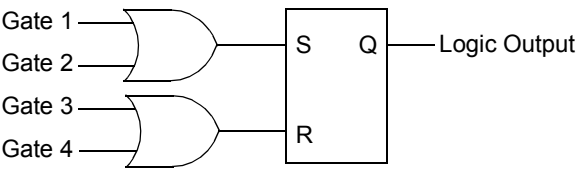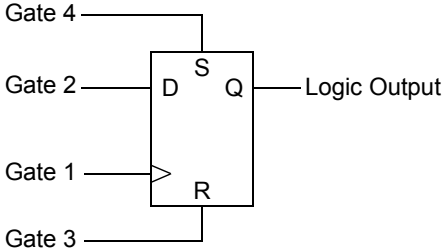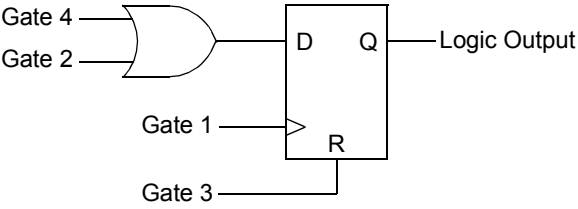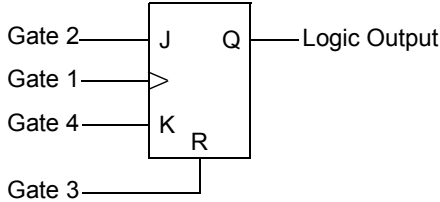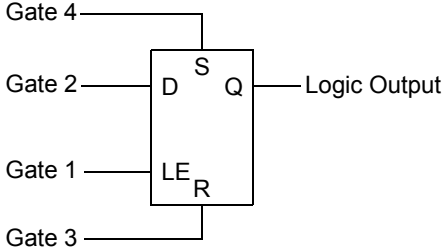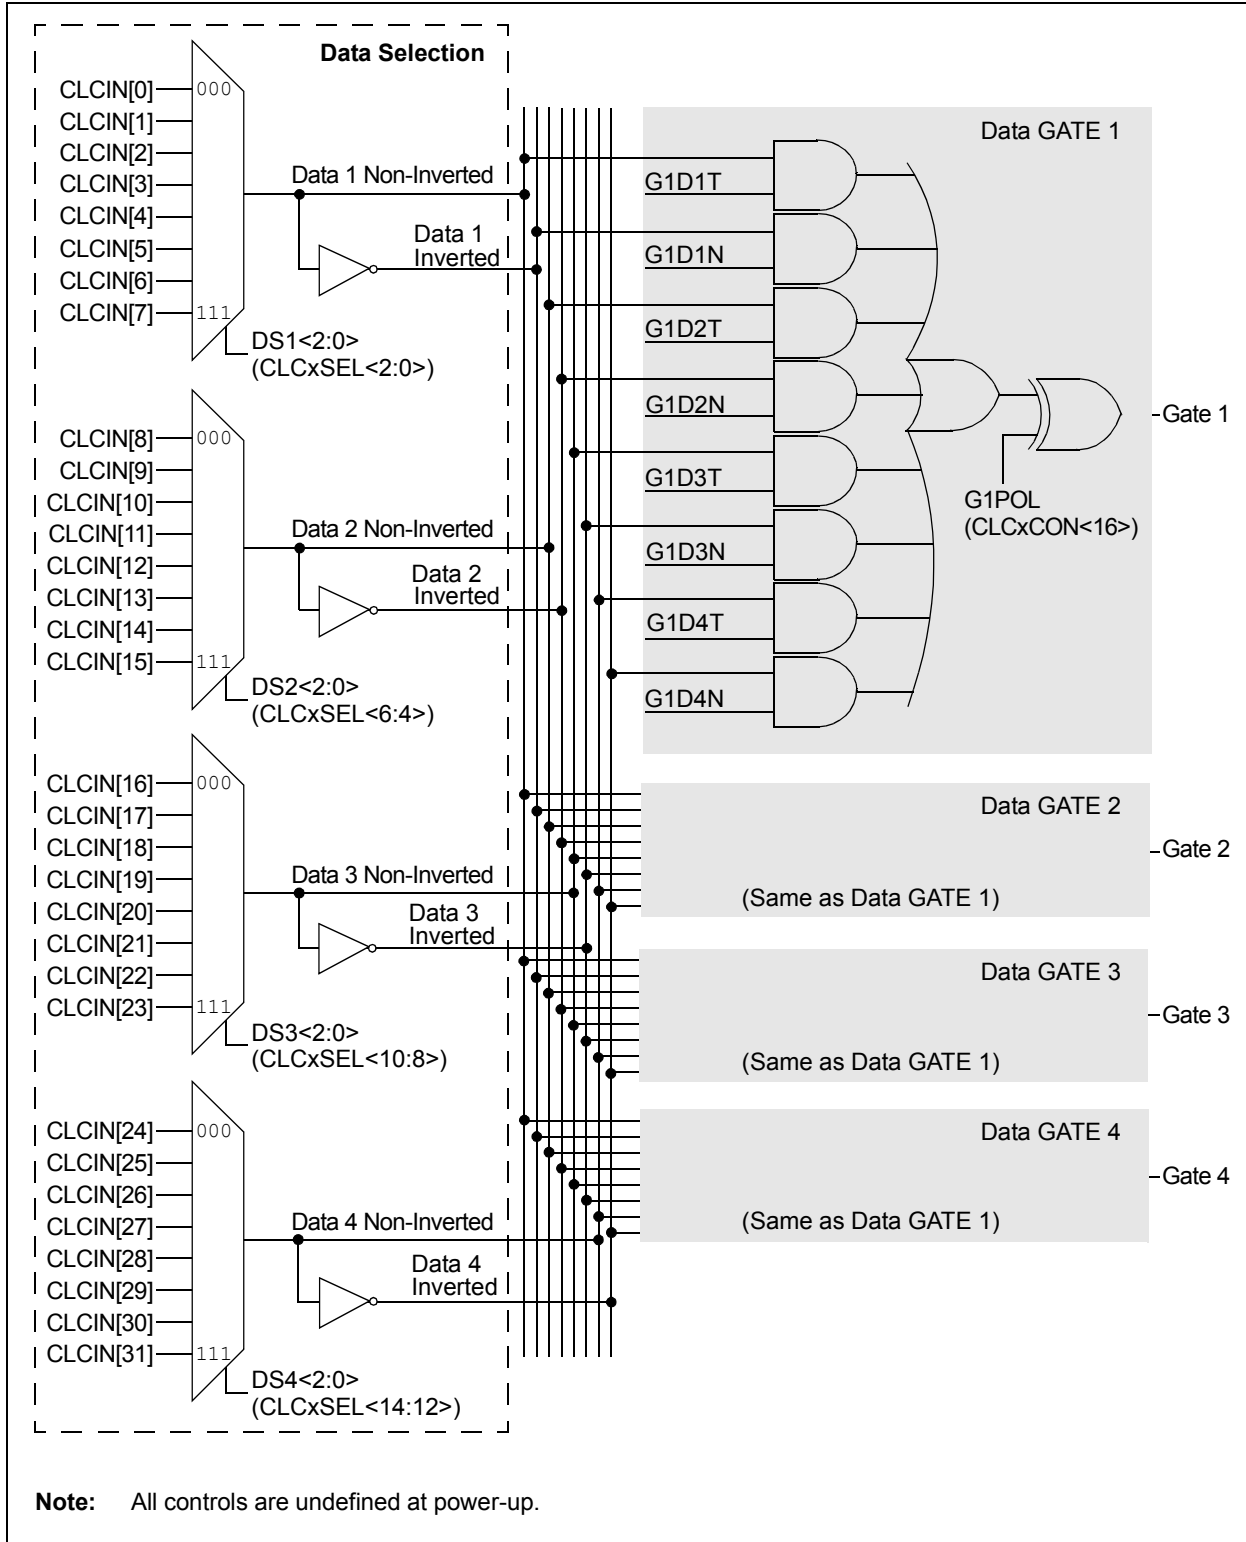

36.2 REGISTERS

The CLC module is controlled by the following registers:

- CLCxCON
- CLCxSEL
- CLCxGLS

The CLCx Control register (CLCxCON) is used to enable the module and interrupts, control the output enable bit, select output polarity and select the logic function. The CLCx Control register also allows the user to control the logic polarity of not only the cell output, but also some intermediate variables.

The CLCx Input MUX Select register (CLCxSEL) allows the user to select one out of eight input signals for each of the four data selection multiplexers, pictured inside the dashed line in [Figure 36-3](#). The output of each of the four data selection multiplexers is connected to the inputs of the logic function selected by the MODE<2:0> bits (CLCxCON<2:0>), see [Figure 36-2](#).

The CLCx Source Enable register (CLCxGLS) allows the user to create any four variable boolean expressions from the four input data sources configured by CLCxSEL. Both the True and complimentary values for each of the four signals, chosen by the CLCx Input MUX Select register (CLCxSEL), are available to the sum-of-products circuit pictured in the data gate in [Figure 36-3](#).

[Table 36-1](#) provides a brief summary of all CLC module-related registers. Corresponding registers appear after the summary, followed by a detailed description of each register.

Table 36-1: Configurable Logic Cell SFRs Summary

Name	Bit Range	Bit 31/23/15/7	Bit 30/22/14/6	Bit 29/21/13/5	Bit 28/20/12/4	Bit 27/19/11/3	Bit 26/18/10/2	Bit 25/17/9/1	Bit 24/16/8/0
CLCxCON	31:24	—	—	—	—	—	—	—	—
	23:16	—	—	—	—	G4POL	G3POL	G2POL	G1POL
	15:8	ON	—	—	—	INTP	INTN	—	—
	7:0	LCOE	LCOUT	LCPOL	—	—	MODE<2:0>		
CLCxSEL	31:24	—	—	—	—	—	—	—	—
	23:16	—	—	—	—	—	—	—	—
	15:8	—	DS4<2:0>			—	DS3<2:0>		
	7:0	—	DS2<2:0>			—	DS1<2:0>		
CLCxGLS	31:24	G4D4T	G4D4N	G4D3T	G4D3N	G4D2T	G4D2N	G4D1T	G4D1N
	23:16	G3D4T	G3D4N	G3D3T	G3D3N	G3D2T	G3D2N	G3D1T	G3D1N
	15:8	G2D4T	G2D4N	G2D3T	G2D3N	G2D2T	G2D2N	G2D1T	G2D1N
	7:0	G1D4T	G1D4N	G1D3T	G1D3N	G1D2T	G1D2N	G1D1T	G1D1N

PIC32 Family Reference Manual

Register 36-1: CLCxCON: Configurable Logic Cell x Control Register

Bit Range	Bit 31/23/15/7	Bit 30/22/14/6	Bit 29/21/13/5	Bit 28/20/12/4	Bit 27/19/11/3	Bit 26/18/10/2	Bit 25/17/9/1	Bit 24/16/8/0
31:24	U-0	U-0	U-0	U-0	U-0	U-0	U-0	U-0
	—	—	—	—	—	—	—	—
23:16	U-0	U-0	U-0	U-0	R/W-0	R/W-0	R/W-0	R/W-0
	—	—	—	—	G4POL	G3POL	G2POL	G1POL
15:8	R/W-0	U-0	U-0	U-0	R/W-0	R/W-0	U-0	U-0
	ON	—	—	—	INTP	INTN	—	—
7:0	R-0	R-0	R/W-0	U-0	U-0	R/W-0	R/W-0	R/W-0
	LCOE	LCOUT	LCPOL	—	—	MODE<2:0>		

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
 -n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

- bit 31-20 **Unimplemented:** Read as '0'
- bit 19 **G4POL:** Gate 4 Polarity Control bit
 - 1 = The output of Gate 4 logic is inverted when applied to the logic cell
 - 0 = The output of Gate 4 logic is not inverted
- bit 18 **G3POL:** Gate 3 Polarity Control bit
 - 1 = The output of Gate 3 logic is inverted when applied to the logic cell
 - 0 = The output of Gate 3 logic is not inverted
- bit 17 **G2POL:** Gate 2 Polarity Control bit
 - 1 = The output of Gate 2 logic is inverted when applied to the logic cell
 - 0 = The output of Gate 2 logic is not inverted
- bit 16 **G1POL:** Gate 1 Polarity Control bit
 - 1 = The output of Gate 1 logic is inverted when applied to the logic cell
 - 0 = The output of Gate 1 logic is not inverted
- bit 15 **ON:** Configurable Logic Cell Enable bit
 - 1 = Configurable Logic Cell is enabled and mixing input signals
 - 0 = Configurable Logic Cell is disabled and has logic zero outputs
- bit 14-12 **Unimplemented:** Read as '0'
- bit 11 **INTP:** Configurable Logic Cell Positive Edge Interrupt Enable bit
 - 1 = Interrupt will be generated when a rising edge occurs on LCOUT
 - 0 = Interrupt will not be generated
- bit 10 **INTN:** Configurable Logic Cell Negative Edge Interrupt Enable bit
 - 1 = Interrupt will be generated when a falling edge occurs on LCOUT
 - 0 = Interrupt will not be generated
- bit 9-8 **Unimplemented:** Read as '0'
- bit 7 **LCOE:** Configurable Logic Cell Port Enable bit
 - 1 = Configurable Logic Cell port pin output is enabled
 - 0 = Configurable Logic Cell port pin output is disabled
- bit 6 **LCOUT:** Configurable Logic Cell Data Output Status bit
 - 1 = Configurable Logic Cell output high
 - 0 = Configurable Logic Cell output low
- bit 5 **LCPOL:** Configurable Logic Cell Output Polarity Control bit
 - 1 = The output of the module is inverted
 - 0 = The output of the module is not inverted

Register 36-1: CLCxCON: Configurable Logic Cell x Control Register (Continued)

- bit 4-3 **Unimplemented:** Read as '0'
- bit 2-0 **MODE<2:0>:** Configurable Logic Cell Mode bits
- 111 = Cell is 1-input transparent latch with S and R
 - 110 = Cell is J-K flip-flop with R
 - 101 = Cell is 2-input D flip-flop with R
 - 100 = Cell is 1-input D flip-flop with S and R
 - 011 = Cell is SR latch
 - 010 = Cell is 4-input AND
 - 001 = Cell is OR-XOR
 - 000 = Cell is AND-OR

PIC32 Family Reference Manual

Register 36-2: CLCxSEL: Configurable Logic Cell x Input MUX Select Register

Bit Range	Bit 31/23/15/7	Bit 30/22/14/6	Bit 29/21/13/5	Bit 28/20/12/4	Bit 27/19/11/3	Bit 26/18/10/2	Bit 25/17/9/1	Bit 24/16/8/0
31:24	U-0	U-0	U-0	U-0	U-0	U-0	U-0	U-0
	—	—	—	—	—	—	—	—
23:16	U-0	U-0	U-0	U-0	U-0	U-0	U-0	U-0
	—	—	—	—	—	—	—	—
15:8	U-0	R/W-0	R/W-0	R/W-0	U-0	R/W-0	R/W-0	R/W-0
	—	DS4<2:0>			—	DS3<2:0>		
7:0	U-0	R/W-0	R/W-0	R/W-0	U-0	R/W-0	R/W-0	R/W-0
	—	DS2<2:0>			—	DS1<2:0>		

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
 -n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

- bit 31-15 **Unimplemented:** Read as '0'
- bit 14-12 **DS4<2:0>:** Data Selection MUX 4 Signal Selection bits
 xxx = Device-specific; refer to the device data sheet for gate select mapping for MUX 4
- bit 11 **Unimplemented:** Read as '0'
- bit 10-8 **DS3<2:0>:** Data Selection MUX 3 Signal Selection bits
 xxx = Device-specific; refer to the device data sheet for gate select mapping for MUX 3
- bit 7 **Unimplemented:** Read as '0'
- bit 6-4 **DS2<2:0>:** Data Selection MUX 2 Signal Selection bits
 xxx = Device-specific; refer to the device data sheet for gate select mapping for MUX 2
- bit 3 **Unimplemented:** Read as '0'
- bit 2-0 **DS1<2:0>:** Data Selection MUX 1 Signal Selection bits
 xxx = Device-specific; refer to the device data sheet for gate select mapping for MUX 1

Register 36-3: CLCxGLS: Configurable Logic Cell x Source Enable Register

Bit Range	Bit 31/23/15/7	Bit 30/22/14/6	Bit 29/21/13/5	Bit 28/20/12/4	Bit 27/19/11/3	Bit 26/18/10/2	Bit 25/17/9/1	Bit 24/16/8/0
31:24	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
	G4D4T	G4D4N	G4D3T	G4D3N	G4D2T	G4D2N	G4D1T	G4D1N
23:16	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
	G3D4T	G3D4N	G3D3T	G3D3N	G3D2T	G3D2N	G3D1T	G3D1N
15:8	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
	G2D4T	G2D4N	G2D3T	G2D3N	G2D2T	G2D2N	G2D1T	G2D1N
7:0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
	G1D4T	G1D4N	G1D3T	G1D3N	G1D2T	G1D2N	G1D1T	G1D1N

Legend:

R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'
-n = Value at POR	'1' = Bit is set	'0' = Bit is cleared x = Bit is unknown

- bit 31 **G4D4T:** Gate 4 Data 4 True Enable bit
 1 = The Data 4 (non-inverted) signal is enabled for Gate 4
 0 = The Data 4 (non-inverted) signal is disabled for Gate 4
- bit 30 **G4D4N:** Gate 4 Data 4 Negated Enable bit
 1 = The Data 4 (inverted) signal is enabled for Gate 4
 0 = The Data 4 (inverted) signal is disabled for Gate 4
- bit 29 **G4D3T:** Gate 4 Data 3 True Enable bit
 1 = The Data 3 (non-inverted) signal is enabled for Gate 4
 0 = The Data 3 (non-inverted) signal is disabled for Gate 4
- bit 28 **G4D3N:** Gate 4 Data 3 Negated Enable bit
 1 = The Data 3 (inverted) signal is enabled for Gate 4
 0 = The Data 3 (inverted) signal is disabled for Gate 4
- bit 27 **G4D2T:** Gate 4 Data 2 True Enable bit
 1 = The Data 2 (non-inverted) signal is enabled for Gate 4
 0 = The Data 2 (non-inverted) signal is disabled for Gate 4
- bit 26 **G4D2N:** Gate 4 Data 2 Negated Enable bit
 1 = The Data 2 (inverted) signal is enabled for Gate 4
 0 = The Data 2 (inverted) signal is disabled for Gate 4
- bit 25 **G4D1T:** Gate 4 Data 1 True Enable bit
 1 = The Data 1 (non-inverted) signal is enabled for Gate 4
 0 = The Data 1 (non-inverted) signal is disabled for Gate 4
- bit 24 **G4D1N:** Gate 4 Data 1 Negated Enable bit
 1 = The Data 1 (inverted) signal is enabled for Gate 4
 0 = The Data 1 (inverted) signal is disabled for Gate 4
- bit 23 **G3D4T:** Gate 3 Data 4 True Enable bit
 1 = The Data 4 (non-inverted) signal is enabled for Gate 3
 0 = The Data 4 (non-inverted) signal is disabled for Gate 3
- bit 22 **G3D4N:** Gate 3 Data 4 Negated Enable bit
 1 = The Data 4 (inverted) signal is enabled for Gate 3
 0 = The Data 4 (inverted) signal is disabled for Gate 3
- bit 21 **G3D3T:** Gate 3 Data 3 True Enable bit
 1 = The Data 3 (non-inverted) signal is enabled for Gate 3
 0 = The Data 3 (non-inverted) signal is disabled for Gate 3

PIC32 Family Reference Manual

Register 36-3: CLCxGLS: Configurable Logic Cell x Source Enable Register (Continued)

- bit 20 **G3D3N:** Gate 3 Data 3 Negated Enable bit
1 = The Data 3 (inverted) signal is enabled for Gate 3
0 = The Data 3 (inverted) signal is disabled for Gate 3
- bit 19 **G3D2T:** Gate 3 Data 2 True Enable bit
1 = The Data 2 (non-inverted) signal is enabled for Gate 3
0 = The Data 2 (non-inverted) signal is disabled for Gate 3
- bit 18 **G3D2N:** Gate 3 Data 2 Negated Enable bit
1 = The Data 2 (inverted) signal is enabled for Gate 3
0 = The Data 2 (inverted) signal is disabled for Gate 3
- bit 17 **G3D1T:** Gate 3 Data 1 True Enable bit
1 = The Data 1 (non-inverted) signal is enabled for Gate 3
0 = The Data 1 (non-inverted) signal is disabled for Gate 3
- bit 16 **G3D1N:** Gate 3 Data 1 Negated Enable bit
1 = The Data 1 (inverted) signal is enabled for Gate 3
0 = The Data 1 (inverted) signal is disabled for Gate 3
- bit 15 **G2D4T:** Gate 2 Data 4 True Enable bit
1 = The Data 4 (non-inverted) signal is enabled for Gate 2
0 = The Data 4 (non-inverted) signal is disabled for Gate 2
- bit 14 **G2D4N:** Gate 2 Data 4 Negated Enable bit
1 = The Data 4 (inverted) signal is enabled for Gate 2
0 = The Data 4 (inverted) signal is disabled for Gate 2
- bit 13 **G2D3T:** Gate 2 Data 3 True Enable bit
1 = The Data 3 (non-inverted) signal is enabled for Gate 2
0 = The Data 3 (non-inverted) signal is disabled for Gate 2
- bit 12 **G2D3N:** Gate 2 Data 3 Negated Enable bit
1 = The Data 3 (inverted) signal is enabled for Gate 2
0 = The Data 3 (inverted) signal is disabled for Gate 2
- bit 11 **G2D2T:** Gate 2 Data 2 True Enable bit
1 = The Data 2 (non-inverted) signal is enabled for Gate 2
0 = The Data 2 (non-inverted) signal is disabled for Gate 2
- bit 10 **G2D2N:** Gate 2 Data 2 Negated Enable bit
1 = The Data 2 (inverted) signal is enabled for Gate 2
0 = The Data 2 (inverted) signal is disabled for Gate 2
- bit 9 **G2D1T:** Gate 2 Data 1 True Enable bit
1 = The Data 1 (non-inverted) signal is enabled for Gate 2
0 = The Data 1 (non-inverted) signal is disabled for Gate 2
- bit 8 **G2D1N:** Gate 2 Data 1 Negated Enable bit
1 = The Data 1 (inverted) signal is enabled for Gate 2
0 = The Data 1 (inverted) signal is disabled for Gate 2
- bit 7 **G1D4T:** Gate 1 Data 4 True Enable bit
1 = The Data 4 (non-inverted) signal is enabled for Gate 1
0 = The Data 4 (non-inverted) signal is disabled for Gate 1
- bit 6 **G1D4N:** Gate 1 Data 4 Negated Enable bit
1 = The Data 4 (inverted) signal is enabled for Gate 1
0 = The Data 4 (inverted) signal is disabled for Gate 1
- bit 5 **G1D3T:** Gate 1 Data 3 True Enable bit
1 = The Data 3 (non-inverted) signal is enabled for Gate 1
0 = The Data 3 (non-inverted) signal is disabled for Gate 1
- bit 4 **G1D3N:** Gate 1 Data 3 Negated Enable bit
1 = The Data 3 (inverted) signal is enabled for Gate 1
0 = The Data 3 (inverted) signal is disabled for Gate 1

Register 36-3: CLCxGLS: Configurable Logic Cell x Source Enable Register (Continued)

- bit 3 **G1D2T:** Gate 1 Data 2 True Enable bit
 1 = The Data 2 (non-inverted) signal is enabled for Gate 1
 0 = The Data 2 (non-inverted) signal is disabled for Gate 1
- bit 2 **G1D2N:** Gate 1 Data 2 Negated Enable bit
 1 = The Data 2 (inverted) signal is enabled for Gate 1
 0 = The Data 2 (inverted) signal is disabled for Gate 1
- bit 1 **G1D1T:** Gate 1 Data 1 True Enable bit
 1 = The Data 1 (non-inverted) signal is enabled for Gate 1
 0 = The Data 1 (non-inverted) signal is disabled for Gate 1
- bit 0 **G1D1N:** Gate 1 Data 1 Negated Enable bit
 1 = The Data 1 (inverted) signal is enabled for Gate 1
 0 = The Data 1 (inverted) signal is disabled for Gate 1

36.3 CLC SETUP

CLCxCON configures the overall operation of the CLC. The ON bit must be set for the CLC to operate. All registers can be programmed while ON is clear. The GxPOL bits configure the polarity of the data selection multiplexer's output. The LCOUT bit is read-only and reflects the status of the logic cell output. The CLC interrupt can be triggered on the positive or negative edge of LCOUT by setting INTP or INTN. Both the ON and LCOE bits must be set for the module to control the CLCxOUT pin (the I/O pin must be configured as a digital output for CLCxOUT to be present and the presence of the signal is subject to peripherals of higher priority). The logic cell output is driven to an I/O pin when LCOE = 1. When set, the CLC requests control of an I/O pin. When cleared, the logic cell output is kept internal to the microcontroller.

The MODE<2:0> bits set the functional behavior of the logic cell. There are eight logic cells available, as shown in Figure 36-2. When the MODE<2:0> bits are changed, the value of the latch and flip-flop logic cells remains the same, provided LE, R or S do not force a change.

Three of the state options define "Gate 1" as a rising edge clock with the traditional meanings of D and J-K flip-flops. The 4th state option (MODE<2:0> = 111) is a transparent latch; Q follows D when LE is true; Q holds state when LE is false. For options with both S (Set) and R (Reset) inputs, the output changes asynchronously to the clock when S or R is a logic '1'; R is dominant. The R and S inputs to the combinatorial RS latch (MODE<2:0> = 011) do not affect the value of the state register ('1xx'). Options drawn with an unconnected S input have S tied to an inactive state.

The final polarity of the CLC module output is controlled by LCPOL. The output is inverted when LCPOL = 1 and uninverted when LCPOL = 0. The GxPOL bits control the polarity of the logic function inputs.

The CLCxSEL (Register 36-2) register controls which input signals are routed to the input bus of Figure 36-3. Both the True (T) and Negated (N) values are made available in the data bus. The CLCxGLS register selects which signals from the data bus are applied to the input OR gates. True and Negated inputs are separately enabled; enabling both is not recommended. Refer to Example 36-1 for sample CLC configuration code.

Example 36-1: Sample CLC Configuration Code

```

ANSELBbits.ANSB15 = 0;    // configure pins used for CLC input as digital pins
ANSELBbits.ANSB14 = 0;
ANSELBbits.ANSB13 = 0;
ANSELBbits.ANSB12 = 0;

CLC1CONbits.G4POL= 0;    // CLC gate outputs non-inverting
CLC1CONbits.G3POL= 0;
CLC1CONbits.G2POL= 0;
CLC1CONbits.G1POL= 0;

CLC1SELbits.DS4 = 3;    // Data4 input is SDI1 pin
CLC1SELbits.DS3 = 4;    // Data3 input is U1RX pin
CLC1SELbits.DS2 = 0;    // Data2 input is CLC1B
CLC1SELbits.DS1 = 0;    // Data1 input CLC1A

CLC1GLS = 0x80200802;    // G4D4, G3D3, G2D2, G1D1 selected

CLC1CONbits.MODE = 2;    // AND operation

CLC1CONbits.LCPOL = 0;    // non-inverting output

CLC1CONbits.LCOE = 1;    // CLC output enabled
CLC1CONbits.ON = 1;    // enable CLC

RPNR12bits.CLCINBR = 13; // map CLCA input to RP11
RPNR12bits.CLCINAR = 12; // map CLCB input to RP12

RPOR4bits.RP18R = 8;    // map CLC output to RP17

```

Note: This example is for a PIC32MMXXXG028 device. CLC inputs selection, analog select and PPS configurations may vary for different device families and packages.

36.4 INPUT PROVIDERS

Each logic cell in the CLC takes four inputs, one from each of the four data gates. Each data gate is connected to eight input sources. The data gate allows the selection between the inverted or non-inverted polarity of each input source. Input sources available for use with the CLC vary by device. Refer to the specific device data sheet for available options.

36.4.1 Source Multiplexers

The module has four input source multiplexers. Multiplexer inputs are selected by setting control bits in the CLCxSEL register to define the data source selected through each of four data selection multiplexers. Each of the four data selection multiplexers feeds one of the four logic function input gates, shown in Figure 36-2. The module has an internal data bus created from the output of each input source multiplexer (see Figure 36-3). The data bus has both True (T) and Negated (N) versions of each selected input source. Therefore, up to eight signals are available on the internal data bus to connect to the input gates of the logic function.

36.4.2 Logic Input Gates

Four logic input gates are used to route input sources from the data selection multiplexers into the four logic function inputs. The True and Negated forms of each input source signal are available for use by each logic gate. The input signal sources are enabled for use by each logic function input using the CLCxGLS register. There are up to eight signals that can be enabled for use by each logic function input. Any number of the eight signal sources may be enabled for each of the four logic function inputs. Each logic gate provides a logical OR of the input signals. The selected (True or Negated) signals are OR'd to form the gate output data. The logical NAND is obtained by changing the output polarity with the GxPOL bits. If the logical AND is required instead, select Negated inputs and invert the output polarity according to DeMorgan's theorem. If all inputs are Negated and applied to a NOR, the result is identical to an AND operation. Written algebraically:

$$C = A \text{ AND } B$$

is the same as:

$$C = \text{NOT}(\text{NOT}(A) \text{ OR } \text{NOT}(B))$$

Table 36-2 summarizes the basic functions that can be obtained by using the gate control bits. The table shows the use of all four input multiplexer sources, but the input gates can be configured to use less. If no inputs are selected (CLCxGLS = 0), the output will be zero or one, depending on the GxPOL bits.

Table 36-2: Desired Logic Operation⁽¹⁾

Operation	CLCxGLS	G1POL	G2POL	G3POL	G4POL	LCPOL	Mode	G1	G2	G3	G4
AND (D1, D2, D3, D4)	0x80200802	0	0	0	0	0	0x2	D1 &	D2 &	D3 &	D4
NAND (D1, D2, D3, D4)	0x80200802	0	0	0	0	1	0x2	!(D1 &	D2 &	D3 &	D4)
OR (D1, D2, D3, D4)	0xAA000000	1	1	1	0	0	0x2	1 &	1 &	1 &	(D4 D3 D2 D1)
NOR (D1, D2, D3, D4)	0xAA000000	1	1	1	0	1	0x2	!(1 &	1 &	1 &	(D4 D3 D2 D1))
XOR (D1, D4)	0x80000002	0	1	1	0	0	0x1	(D1 &	1) ^	(1 &	D4)
1	0x00000000	1	1	1	1	0	0x2	1 &	1 &	1 &	1
0	0x00000000	0	0	0	0	0	0x2	0 &	0 &	0 &	0

Note 1: Refer to Figure 36-3 for more information on gate outputs.

It is possible, but not recommended, to select both the True and Negated values of an input. When this is done, the gate output is one, regardless of the other inputs ($1 = D \text{ OR } \text{NOT}(D)$), but may emit logic glitches (transient-induced pulses). If the output of a gate must be zero or one, the recommended method is to set all of the bits related to that gate in CLCxGLS to zero and use the Gate Polarity bit, GxPOL, to set the desired level.

36.4.3 Logic Function

There are eight available logic functions, including:

- AND-OR
- OR-XOR
- AND
- S-R Latch
- D Flip-Flop with Set and Reset
- D Flip-Flop with Reset
- J-K Flip-Flop with Reset
- Transparent Latch with Set and Reset

Logic functions are shown in [Figure 36-2](#). Each logic function has four inputs and one output. The four inputs are the four data gate outputs of the previous stage. The output is fed to the inversion stage, and from there, to other peripherals, an output pin and back to the CLC.

36.4.4 Software Inputs

The gate data input to the logic function can be directly controlled by software by setting all of the CLCxGLS bits associated with the logic gate to '0' and writing to the appropriate GxPOL bit (see [Table 36-2](#)). The gate output will be equal to the value of the GxPOL bit.

36.5 OUTPUT

LCOUT is the logic cell output and is routed to the I/O port pin or to other modules within the device. In all cases, the signal value is taken after the LCPOL inverter. To observe this output on an I/O pin, the user will need to set LCOE.

36.6 APPLICATION LOGIC

The CLC provides both combinatorial (see [Figure 36-2](#)) and state (see [Figure 36-3](#)) logic function options. The outputs of the input gates are applied to the logic function. If CLCxGLS = 0x00, the function receives a logic '0' when the GxPOL bits are clear or a logic '1' when the GxPOL bits are set.

36.6.1 Combinatorial Logic

The combinatorial functions, shown in [Figure 36-2](#), build on the AND/OR logic of the input gate. The 4-input AND can provide an OR function by inverting the inputs and outputs using DeMorgan's theorem. Inverting the output of the XOR is the same as inverting one input (but not both).

The SR function (MODE<2:0> = 011) is not affected when ON is cleared, as is the case with the state logic register. The latch is Reset-dominant, meaning that the Reset signal takes precedent over any Set (S) signal that may be present.

36.6.2 State Logic

The state functions of [Figure 36-3](#) include both D and J-K flip-flops with asynchronous Set (S) and Reset (R). Input Gate 1 provides a rising edge clock. If a falling edge clock is required, Gate 1 can be inverted in the gate logic (G1POL). Input Gate 2, and sometimes also Gate 4, provide data to the register or latch input(s). When operating in Transparent Latch mode (MODE<2:0> = 111), the output, Q, follows D, while LE is high and holds state while LE is low.

The various modes may or may not share state memory and Switching modes may or may not change the state of the state variable. For all modes, the register is Reset-dominant.

36.7 CLC INTERRUPTS

The CLC module has two types of interrupts that can be enabled: rising edge interrupt events and falling edge interrupt events. These events are enabled by the INTTP and INTN control bits, respectively.

A valid occurrence of either interrupt will set the CLC Interrupt Flag, CLCIF. This will occur when the module is enabled (ON = 1) and either a rising edge output occurs when INTTP = 1, or a falling edge event occurs when INTN = 1.

If the initial output state of the CLC logic is '1' and INTTP = 1, an interrupt will be generated when ON is set to '1'. Likewise, an interrupt will be generated if the initial output state of the CLC is '0' and INTN = 1. These conditions must be detected and cleared in software. Similarly, a false interrupt could be generated if INTTP or INTN is set while the CLC module is enabled.

The user should be sure to clear any spurious interrupt events that may occur in the initialization process of the CLC module.

If the CLC Interrupt Enable bit, CLCIE, is cleared, an interrupt will not be generated. However, the CLCIF bit will still be set if an interrupt condition occurs. The user can clear the interrupt in the Interrupt Service Routine (ISR) by clearing CLCIF. See [Section 8. "Interrupts"](#) (DS61108) in the *"PIC32 Family Reference Manual"* for more information.

36.8 OPERATION IN SLEEP MODE

The CLC module is not affected by Sleep mode, since it does not rely on system clock sources for operation. However, some input sources might be disabled during Sleep, so the function could be disrupted. If the source continues to operate, so will the module. Refer to the specific device data sheet for more information.

36.9 OPERATION IN IDLE MODE

The CLC module is not affected by Idle mode, since it does not rely on system clock sources for operation. However, some input sources might be disabled during Idle and the function could be disrupted. If the sources continue to operate, so will the module. Refer to the specific device data sheet for more information.

36.10 RESET

When the ON bit is written to '0', the output of all state logic functions will be reset to '0'. A system Reset returns the CLCxCON, CLCxSEL and CLCxGLS registers to the default state and disables the module.

Asserting a device Reset returns all bits in the module registers to the default state. The output of all logic functions is '0' after a Reset; this includes both latch and flip-flop functions. When a device Reset is asserted (ON = 0), the state logic is reset and the output of the logic function is forced low.

36.11 RELATED APPLICATION NOTES

This section lists application notes that are related to this section of the manual. These application notes may not be written specifically for the PIC32 device families, but the concepts are pertinent and could be used with modification and possible limitations.

The current application notes related to the Configurable Logic Cell module are:

Title	Application Note #
No related application notes at this time.	

36.12 REVISION HISTORY

Revision A (August 2015)

This is the initial revision of this document.

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as “unbreakable.”

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, flexPWR, JukeBlox, KEELOQ, KEELOQ logo, Klear, LANCheck, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC³² logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

The Embedded Control Solutions Company and mTouch are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, ECAN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, KlearNet, KlearNet logo, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, RightTouch logo, REAL ICE, SQI, Serial Quad I/O, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2015, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-63277-665-5

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949 ==

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



MICROCHIP

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110

Canada - Toronto
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon

Hong Kong
Tel: 852-2943-5100
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Dongguan
Tel: 86-769-8702-9880

China - Hangzhou
Tel: 86-571-8792-8115
Fax: 86-571-8792-8116

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880-3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7828

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Dusseldorf
Tel: 49-2129-3766400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Venice
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Poland - Warsaw
Tel: 48-22-3325737

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820

07/14/15