

### General Description



The QPD1004 is a 25W (P<sub>3dB</sub>), 50Ω-input matched discrete GaN on SiC HEMT which operates from 30MHz to 1200MHz on a 50V supply rail. The integrated input matching network enables wideband gain and power performance, while the output can be matched on board to optimize power and efficiency for any region within the band. It is ideally suited for basestation, radar and communications applications and can support both CW and pulsed mode of operations.

The device is housed in an industry-standard 6 x 5 mm surface mount DFN package.

Lead-free and ROHS compliant

Evaluation boards are available upon request.

### Functional Block Diagram

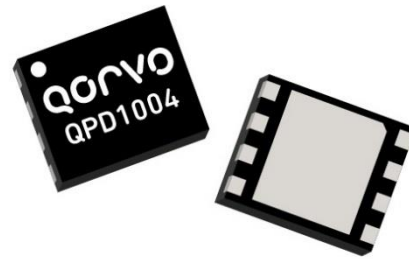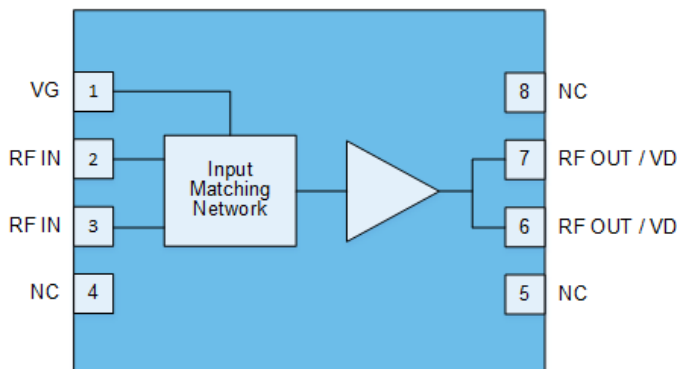

8 Pin DFN (6 x 5 x 0.85 mm)

### Product Features

- Frequency: 30 to 1200 MHz
  - Output Power (P<sub>3dB</sub>): 40 W<sup>1</sup>
  - Linear Gain: 20.8 dB<sup>1</sup>
  - Typical PAE<sub>3dB</sub>: 73.2%<sup>1</sup>
  - Operating Voltage: 50 V
  - Low thermal resistance package
  - CW and Pulse capable
  - 6 x 5 mm package
- Note 1: @ 1.0 GHz (Loadpull)

### Applications

- Military radar
- Land mobile and military radio communications
- Test instrumentation
- Wideband or narrowband amplifiers
- Jammers

### Ordering info

Part No.	ECCN	Description
QPD1004S2	EAR99	2 Piece Sample Bag
QPD1004SQ	EAR99	25 Piece Sample Bag
QPD1004SR	EAR99	100 Piece 7" Reel
QPD1004EVB1	EAR99	30 –1000 MHz EVB

## Absolute Maximum Ratings<sup>2</sup>

Parameter	Rating	Units
Breakdown Voltage, $BV_{DG}$	145	V
Gate Voltage Range, $V_G$	-8 to +2	V
Drain Current, $I_D$	3.6	A
Gate Current Range, $I_G^1$	7.2	mA
Power Dissipation, CW, $P_{DISS}$	27.6	W
RF Input Power at 1 GHz, CW, 50 $\Omega$ , $T = 25^\circ\text{C}$	+29.7	dBm
Channel Temperature, $T_{CH}$	275	$^\circ\text{C}$
Mounting Temperature (30 Seconds)	320	$^\circ\text{C}$
Storage Temperature	-65 to +150	$^\circ\text{C}$

Notes:

1. At Channel temperature of  $200^\circ\text{C}$ .
2. Operation of this device outside the parameter ranges given above may cause permanent damage.

## Recommended Operating Conditions<sup>1</sup>

Parameter	Min	Typ	Max	Units
Operating Temp. Range	-40	+25	+85	$^\circ\text{C}$
Drain Voltage Range, $V_D$	-	+50	+55	V
Drain Bias Current, $I_{DQ}$	-	50	-	mA
Drain Current, $I_D$	-	700	-	mA
Gate Voltage, $V_G^3$	-	-2.8	-	V
Channel Temperature ( $T_{CH}$ )	-	-	250	$^\circ\text{C}$
Power Dissipation, CW ( $P_D$ ) <sup>2</sup>	-	-	25.0	W

Notes:

1. Electrical performance is measured under conditions noted in the electrical specifications table. Specifications are not guaranteed over all recommended operating conditions.
2. Back plane of package at  $85^\circ\text{C}$
3. To be adjusted to desired  $I_{DQ}$

### Pulsed Characterization – Load Pull Performance – Power Tuned

Parameters	Typical Values				Unit
	600	800	1000	1200	
Frequency, F	600	800	1000	1200	MHz
Linear Gain, $G_{LIN}$	21.0	21.2	20.1	18.4	dB
Output Power at 3dB compression point, $P_{3dB}$	45.7	45.9	46.0	45.7	dBm
Power-Added-Efficiency at 3dB compression point, $PAE_{3dB}$	62.4	61.5	63.5	59.5	%
Gain at 3dB compression point	18.0	18.2	17.1	15.4	dB

Notes:

1. Test conditions unless otherwise noted:  $V_D = +50$  V,  $I_{DQ} = 50$  mA, Temp = +25 °C

### Pulsed Characterization – Load Pull Performance – Efficiency Tuned

Parameters	Typical Values				Unit
	600	800	1000	1200	
Frequency	600	800	1000	1200	MHz
Linear Gain, $G_{LIN}$	22.6	22.0	20.8	18.8	dB
Output Power at 3dB compression point, $P_{3dB}$	43.5	44.8	44.9	45.0	dBm
Power-Added-Efficiency at 3dB compression point, $PAE_{3dB}$	73.7	68.6	73.2	65.0	%
Gain at 3dB compression point, $G_{3dB}$	19.6	19.0	17.8	15.8	dB

Notes:

- 1- Test conditions unless otherwise noted:  $V_D = +50$  V,  $I_{DQ} = 50$  mA, Temp = +25 °C

### RF Characterization – 30 – 1000 MHz EVB Performance At 500 MHz<sup>1</sup>

Parameter	Min	Typ	Max	Units
Linear Gain, $G_{LIN}$	–	21.0	–	dB
Output Power at 3dB compression point, $P_{3dB}$	–	44.1	–	dBm
Drain Efficiency at 3dB compression point, $DEFF_{3dB}$	–	65.1	–	%
Gain at 3dB compression point, $G_{3dB}$	–	18.0	–	dB

Notes:

1.  $V_D = +50$  V,  $I_{DQ} = 50$  mA, Temp = +25 °C, CW Signal


### RF Characterization – Mismatch Ruggedness at 1000 MHz

Symbol	Parameter	dB Compression	Typical
VSWR	Impedance Mismatch Ruggedness	3	10:1

Notes:


- 1- Test conditions unless otherwise noted:  $T_A = 25$  °C,  $V_D = 50$  V,  $I_{DQ} = 50$  mA
- 2- Driving input power is determined at CW compression under matched condition at EVB output connector.

## Median Lifetime<sup>1</sup>

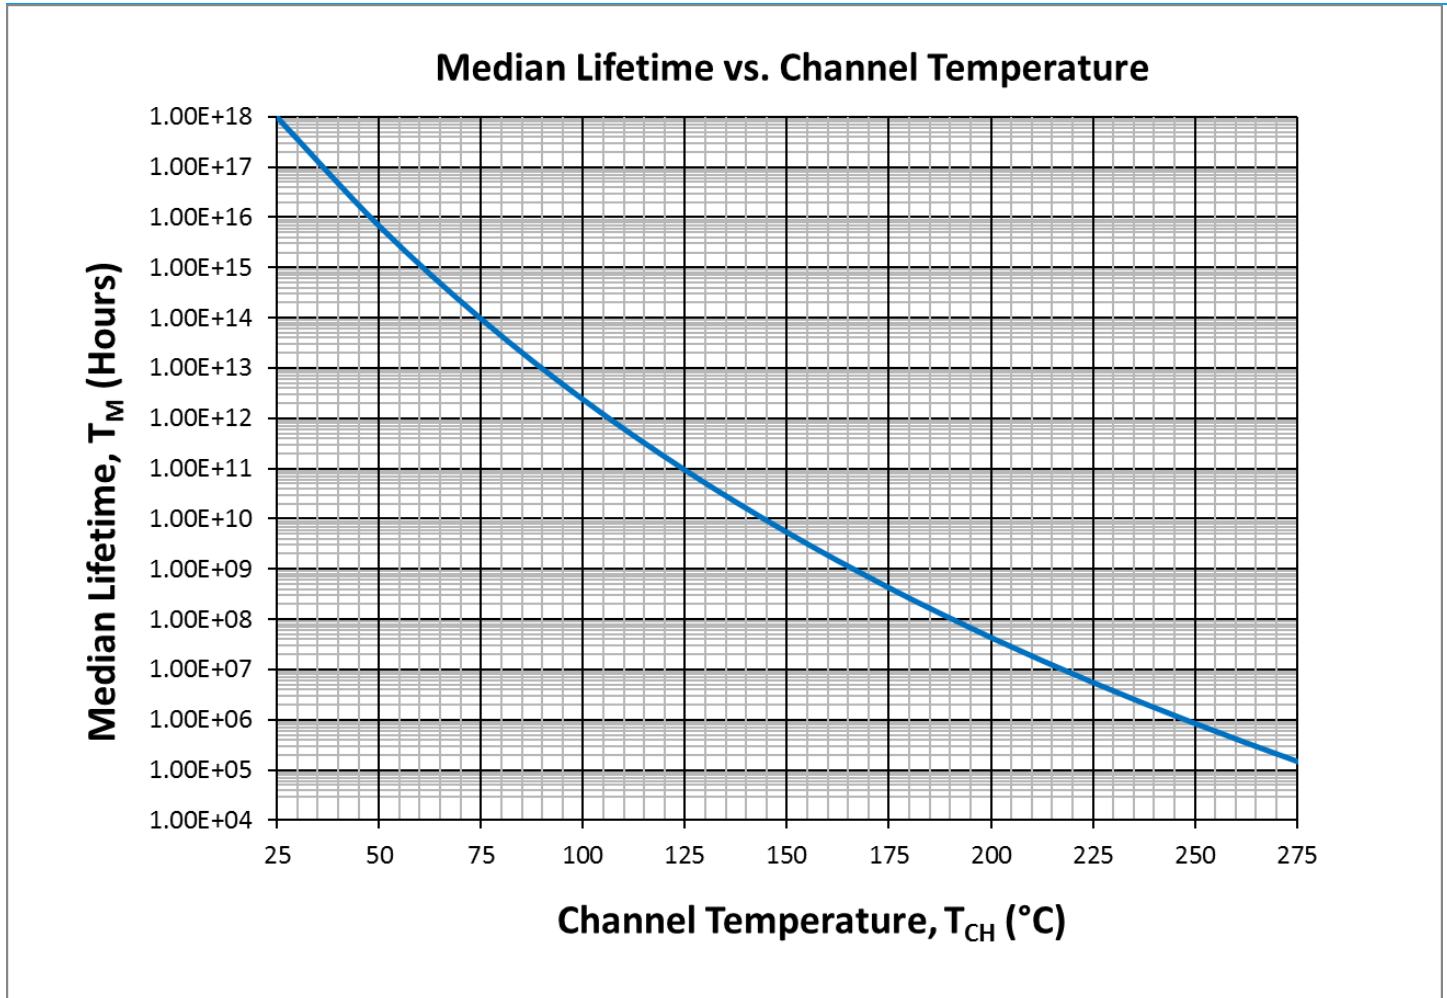

**Note:**

- 1- For pulsed signals, average lifetime is average lifetime at maximum channel temperature divided by duty cycle.

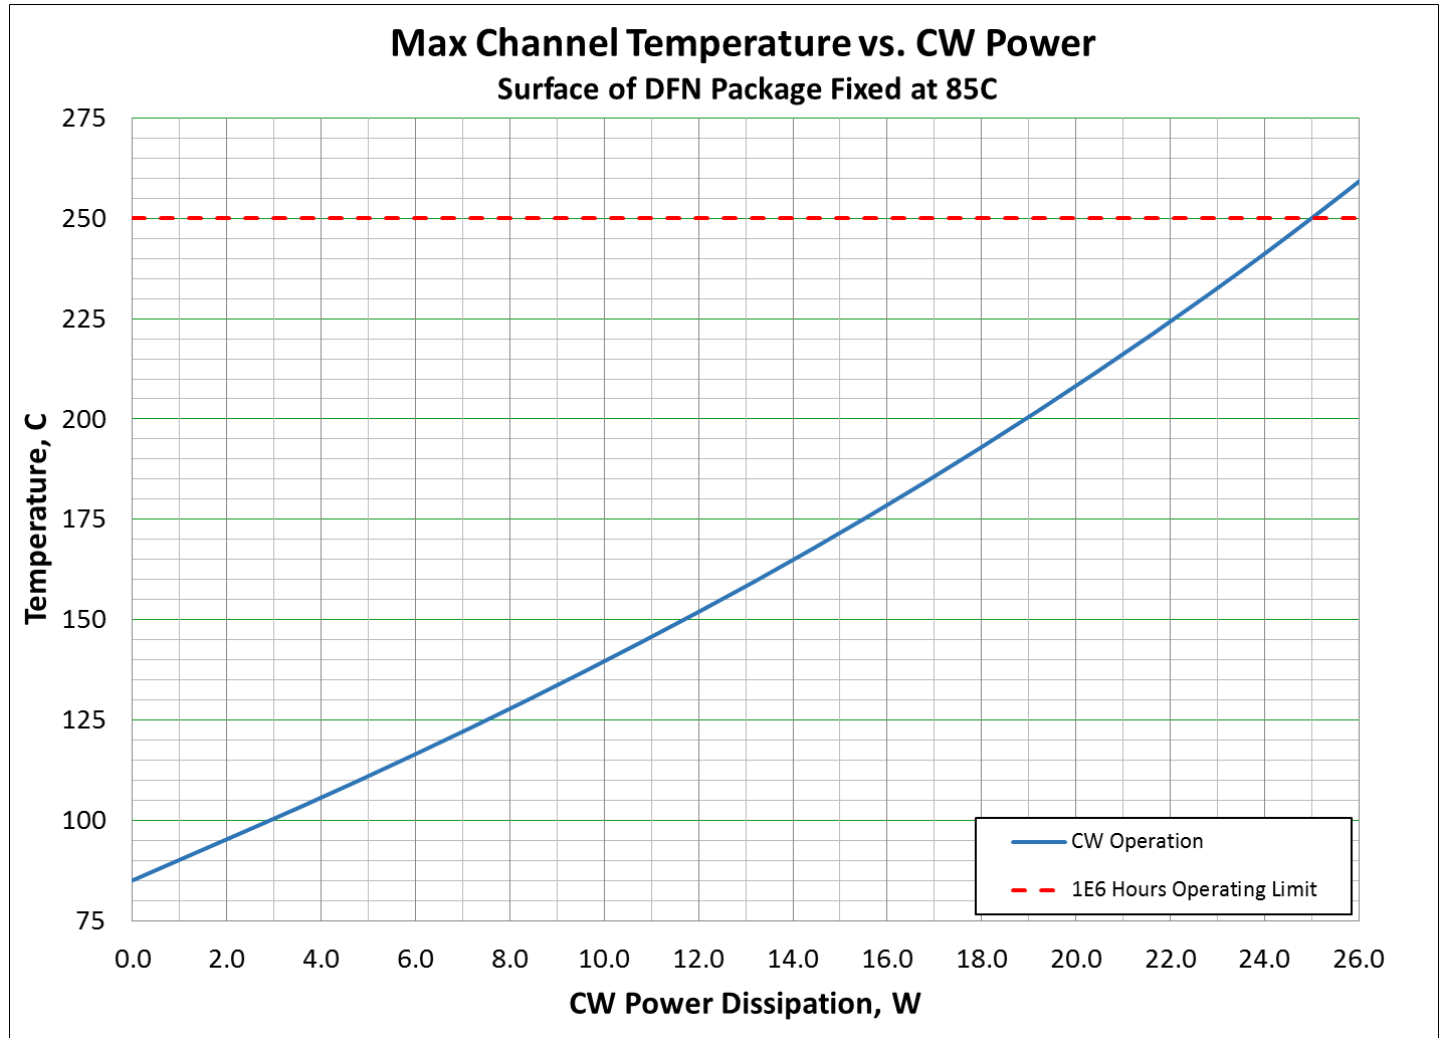**Thermal and Reliability Information - CW**


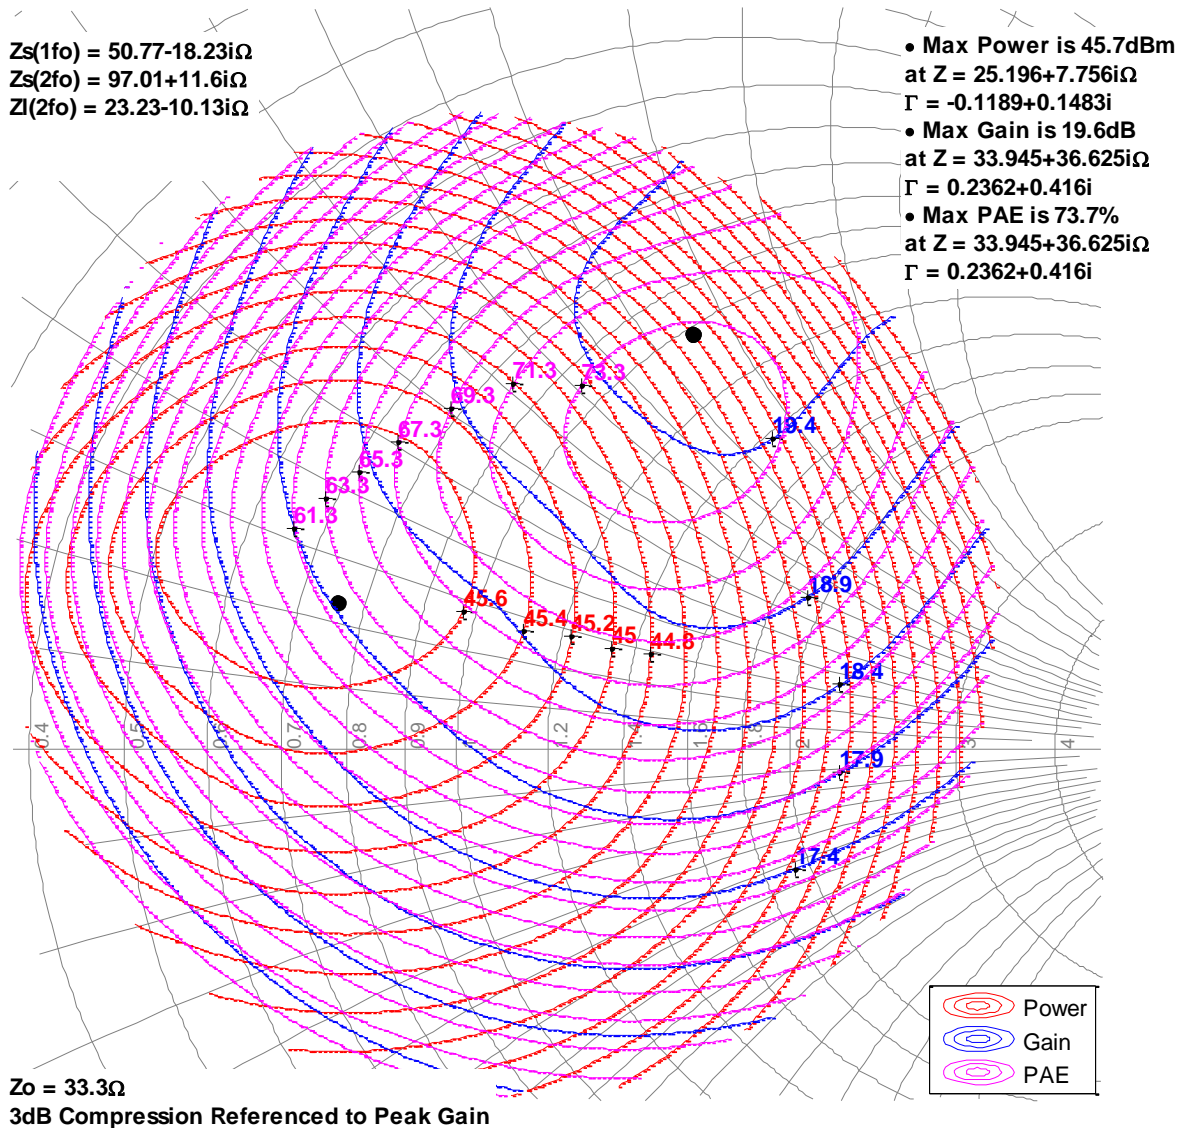
Parameter	Conditions	Values	Units
Thermal Resistance ( $\theta_{JC}$ )	85 °C Case 9.6 W Pdiss, CW	5.4	°C/W
Maximum Channel Temperature ( $T_{CH}$ )		137	°C
Median Lifetime ( $T_M$ )		2.0E10	Hrs
Thermal Resistance ( $\theta_{JC}$ )	85 °C Case 14.4 W Pdiss, CW	5.8	°C/W
Maximum Channel Temperature ( $T_{CH}$ )		168	°C
Median Lifetime ( $T_M$ )		7.0E8	Hrs
Thermal Resistance ( $\theta_{JC}$ )	85 °C Case 19.2 W Pdiss, CW	6.1	°C/W
Maximum Channel Temperature ( $T_{CH}$ )		202	°C
Median Lifetime ( $T_M$ )		3.0E7	Hrs
Thermal Resistance ( $\theta_{JC}$ )	85 °C Case 24.0 W Pdiss, CW	6.5	°C/W
Maximum Channel Temperature ( $T_{CH}$ )		241	°C
Median Lifetime ( $T_M$ )		1.6E6	Hrs

## Load Pull Smith Charts<sup>1,2</sup>

Notes:

1.  $V_d = 50\text{ V}$ ,  $I_{BQ} = 50\text{ mA}$ , Pulsed signal with 100 us pulse width and 10 % duty cycle.
2. See page 15 for load pull and source pull reference planes.

### 0.6 GHz, Load-pull




## Load Pull Smith Charts<sup>1, 2</sup>

Notes:

1.  $V_d = 50\text{ V}$ ,  $I_{BQ} = 50\text{ mA}$ , Pulsed signal with 100 us pulse width and 10 % duty cycle.
2. See page 15 for load pull and source pull reference planes.

### 0.8 GHz, Load-pull

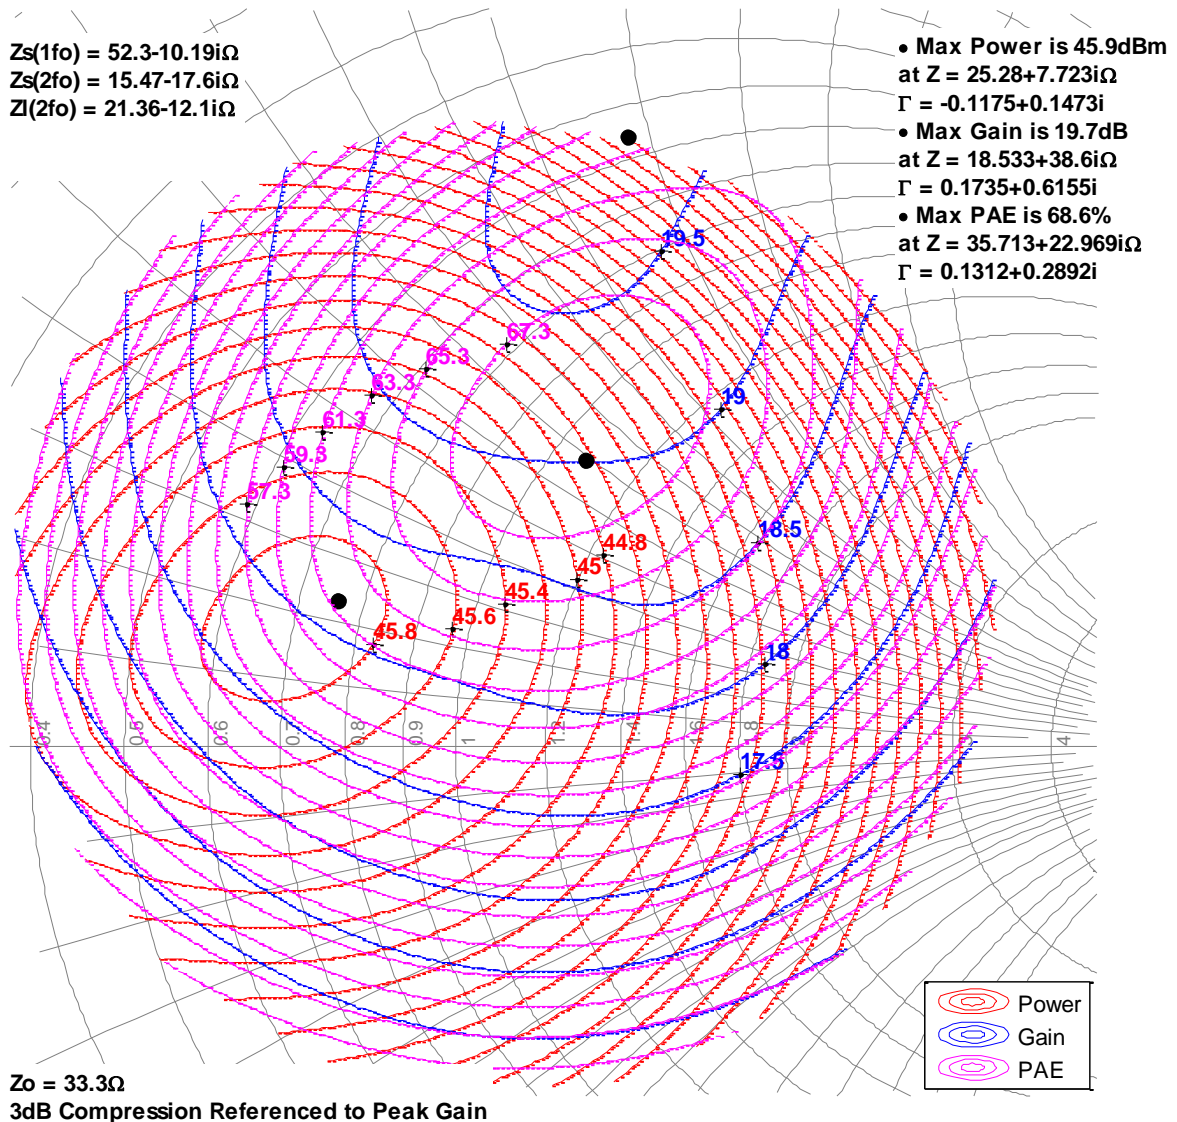


### Load Pull Smith Charts<sup>1,2</sup>

Notes:

1.  $V_d = 50\text{ V}$ ,  $I_{BQ} = 50\text{ mA}$ , Pulsed signal with 100 us pulse width and 10 % duty cycle.
2. See page 15 for load pull and source pull reference planes.

### 1 GHz, Load-pull

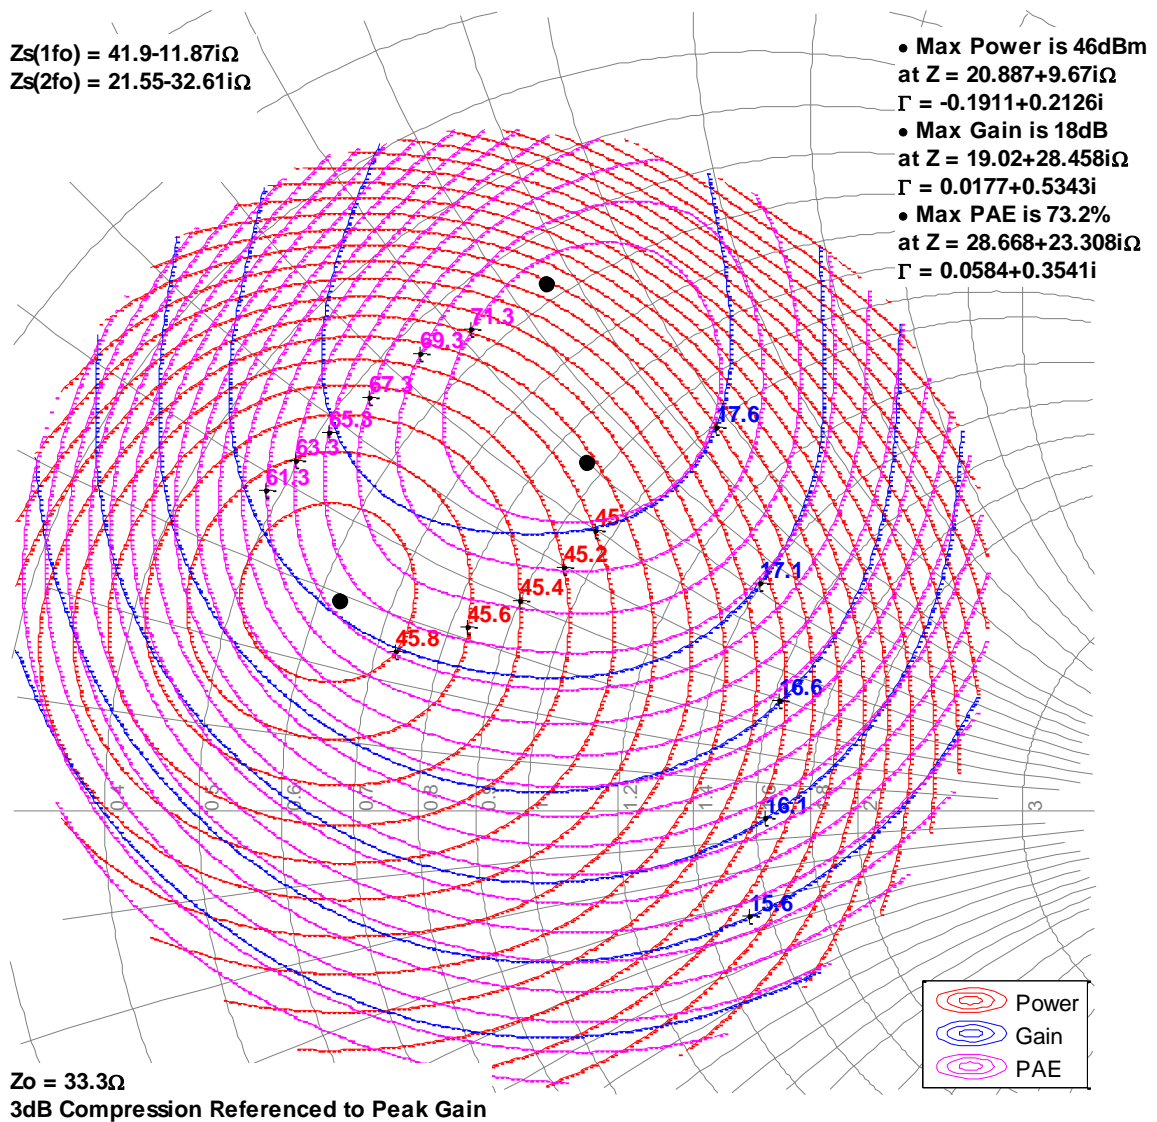




## Load Pull Smith Charts<sup>1,2</sup>

Notes:

1.  $V_d = 50\text{ V}$ ,  $I_{bQ} = 50\text{ mA}$ , Pulsed signal with 100 us pulse width and 10 % duty cycle.
2. See page 15 for load pull and source pull reference planes.







### 1.2 GHz, Load-pull

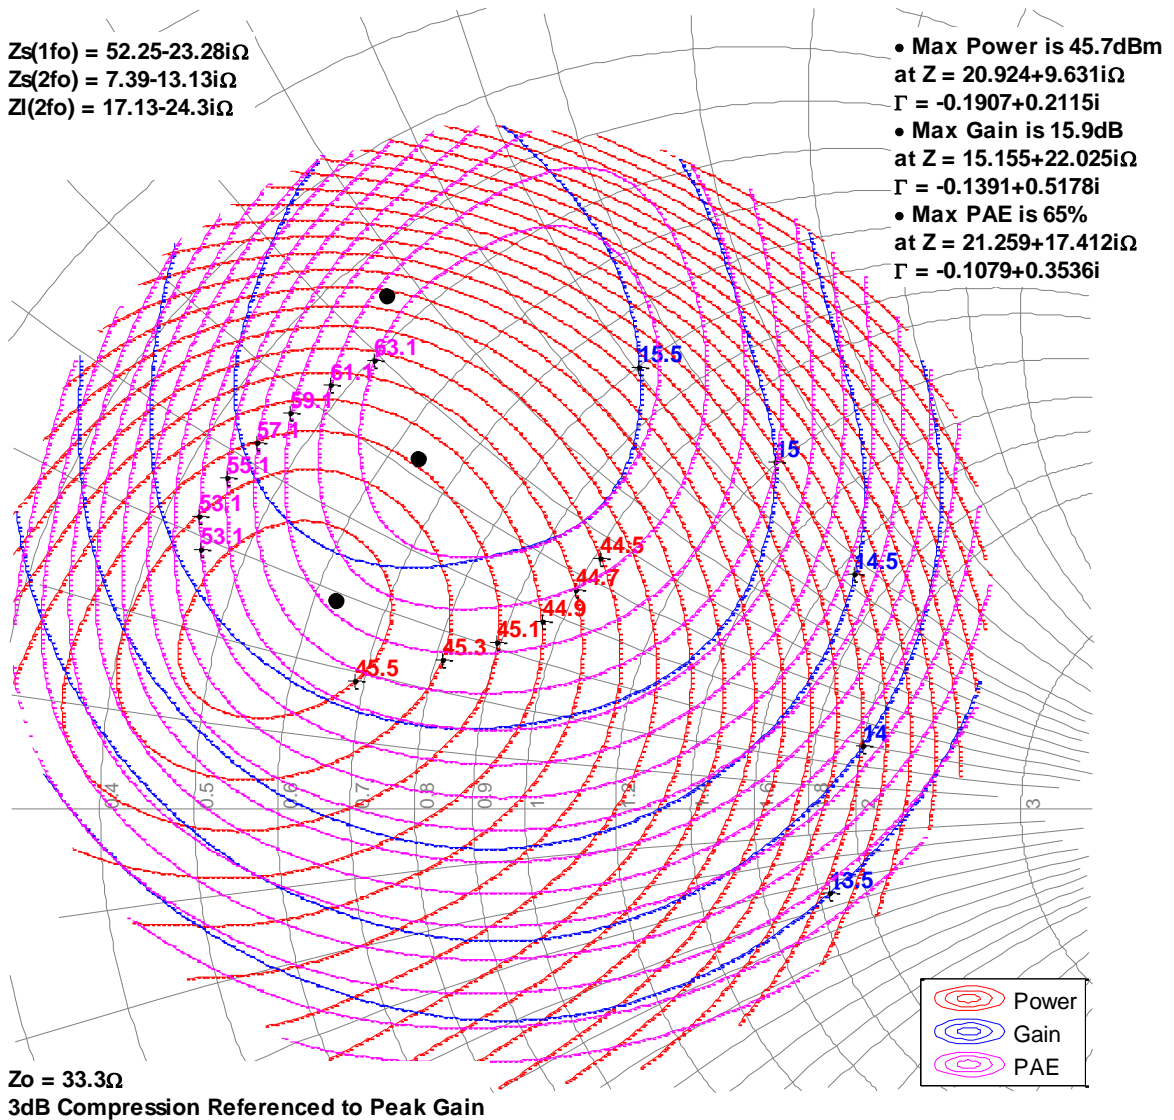

## Typical Performance – Load Pull Drive-up

Notes:



1. Pulsed signal with 100 us pulse width and 10 % duty cycle,  $V_d = 50\text{ V}$ ,  $I_{DQ} = 50\text{ mA}$
2. See page 15 for load pull and source pull reference planes where the performance was measured.

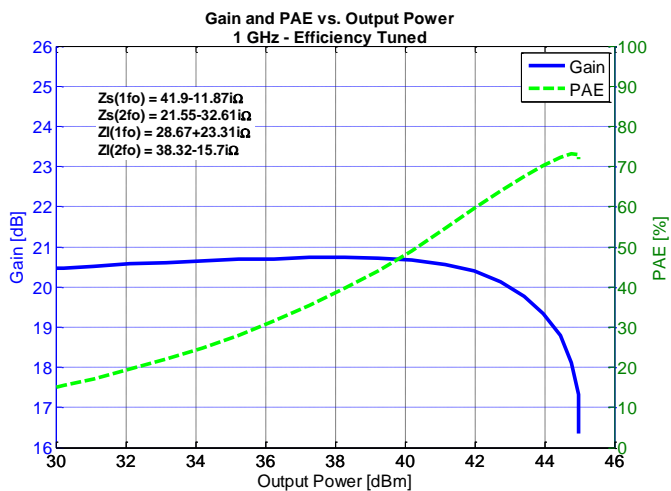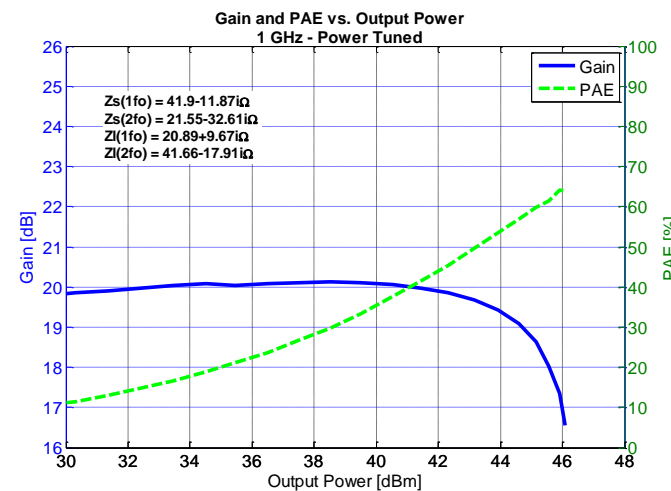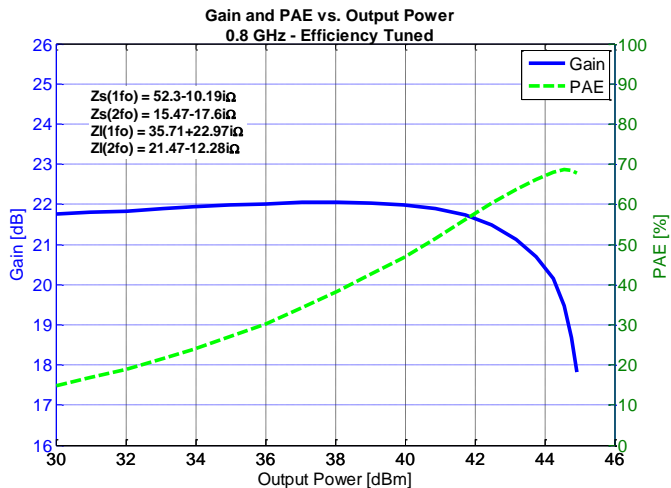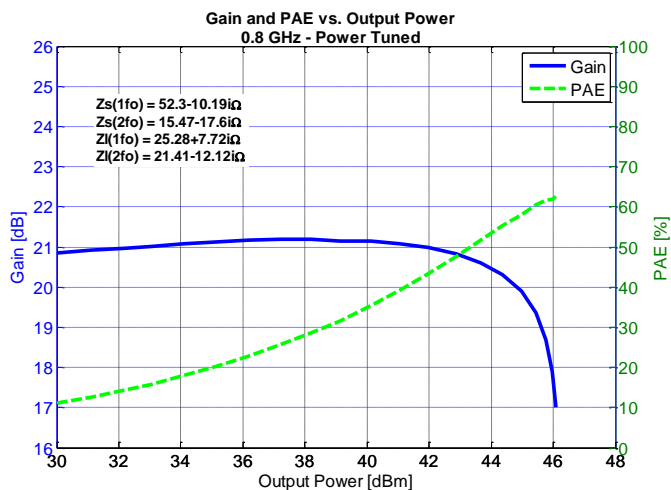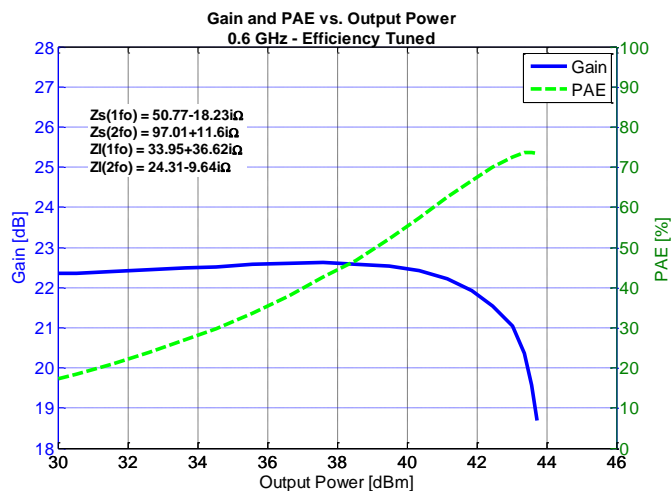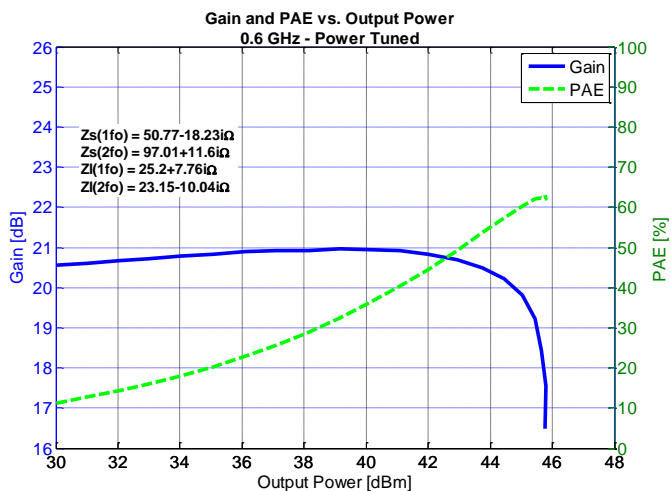

## Typical Performance – Load Pull Drive-up

Notes:





1. Pulsed signal with 100 us pulse width and 10 % duty cycle,  $V_d = 50\text{ V}$ ,  $I_{DQ} = 50\text{ mA}$
2. See page 15 for load pull and source pull reference planes where the performance was measured.

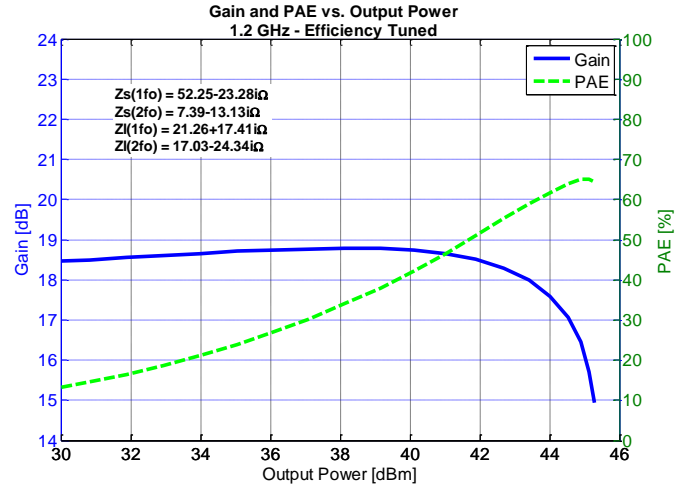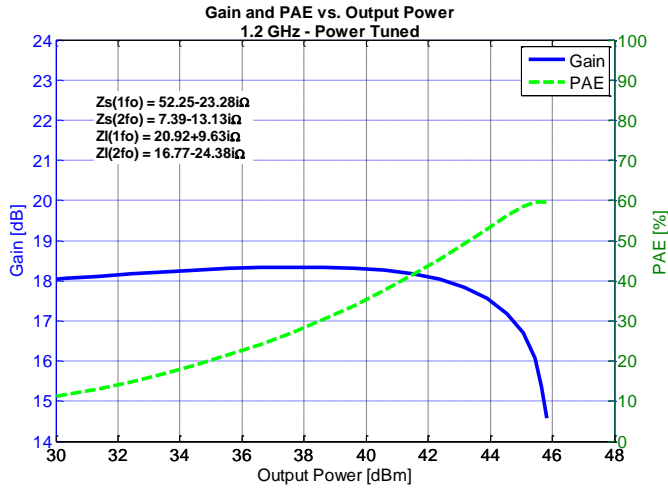

## Power Driveup Performance Over Temperatures of 30 – 1000 MHz EVB<sup>1</sup>

Notes:





- 1-  $V_d = 50\text{ V}$ ,  $I_{DQ} = 50\text{ mA}$ , CW Signal

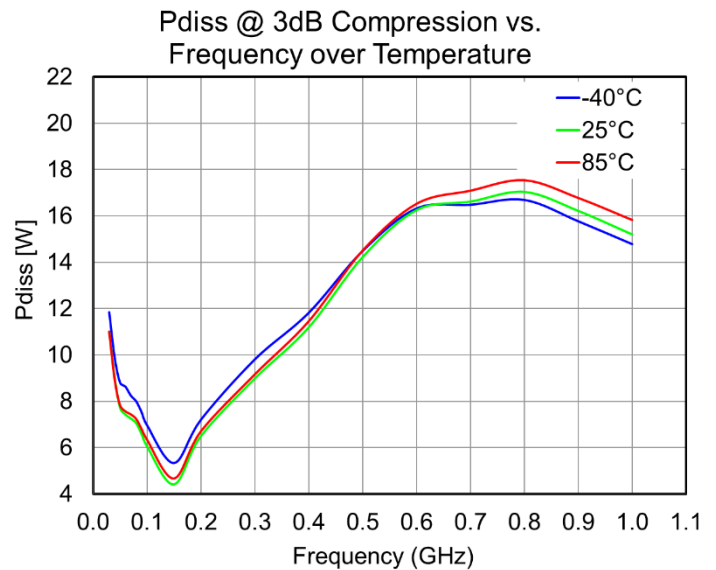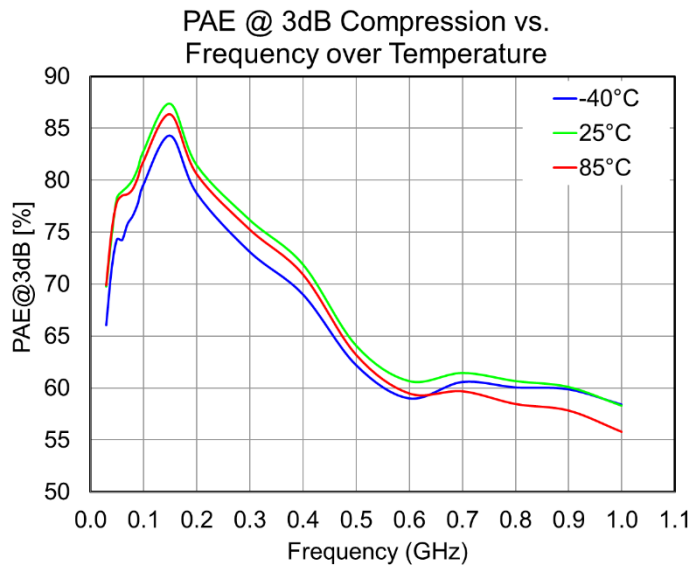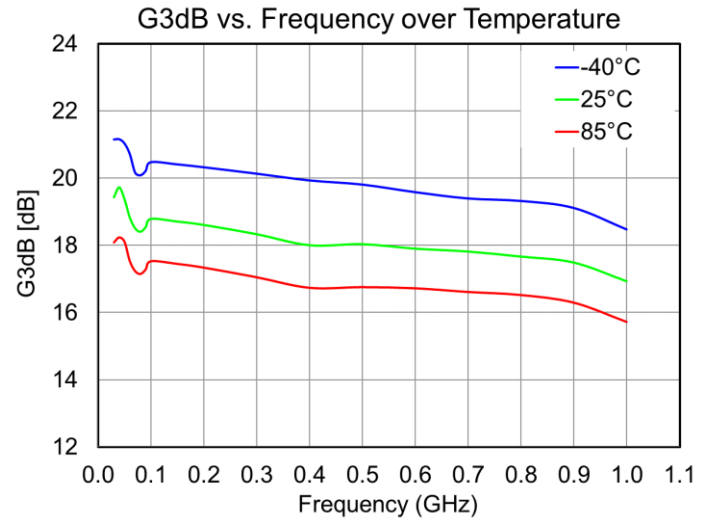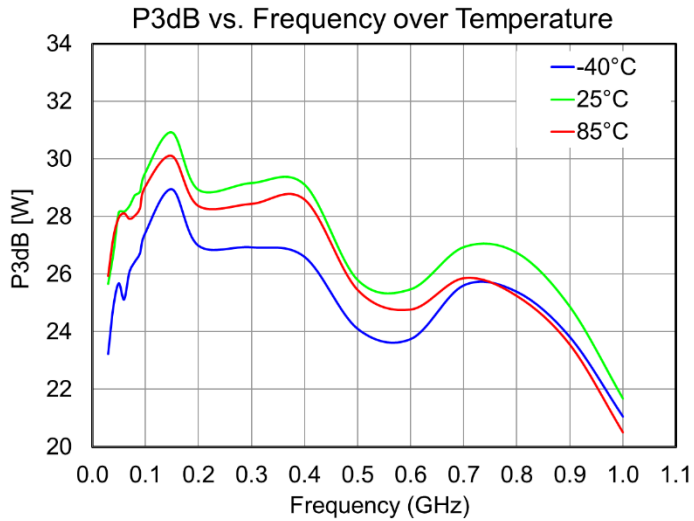

### Power Driveup Performance at 25 °C of 30 – 1000 MHz EVB<sup>1</sup>

Notes:





- 1-  $V_d = 50\text{ V}$ ,  $I_{bq} = 50\text{ mA}$ , CW Signal

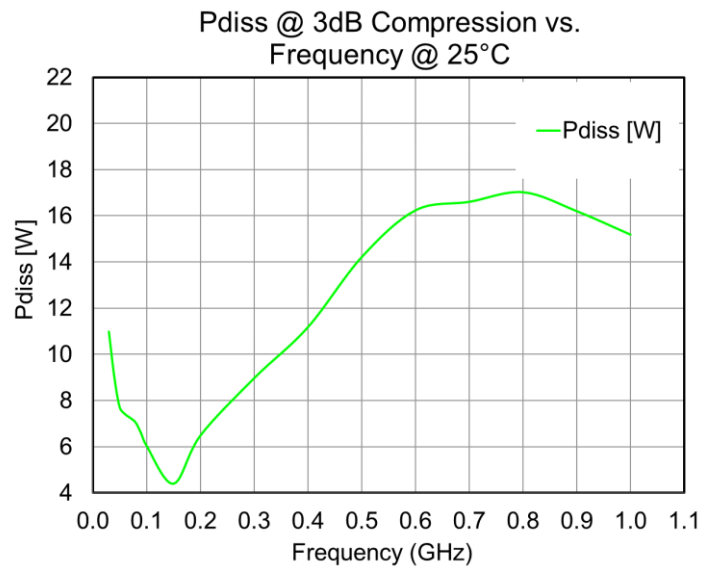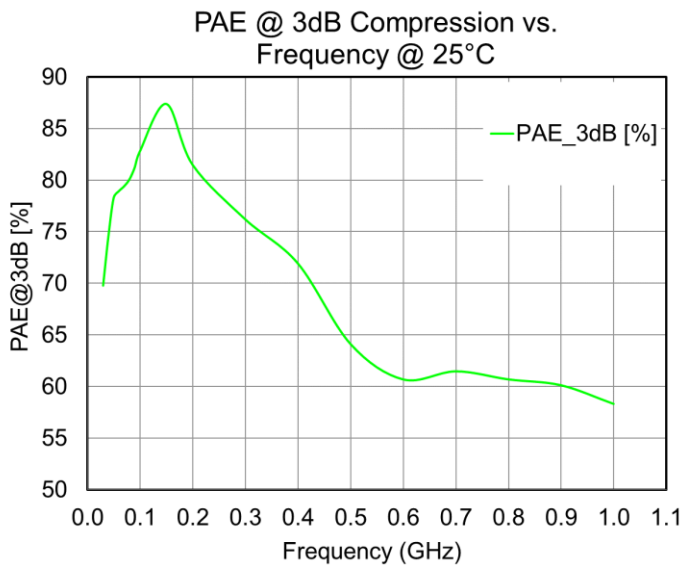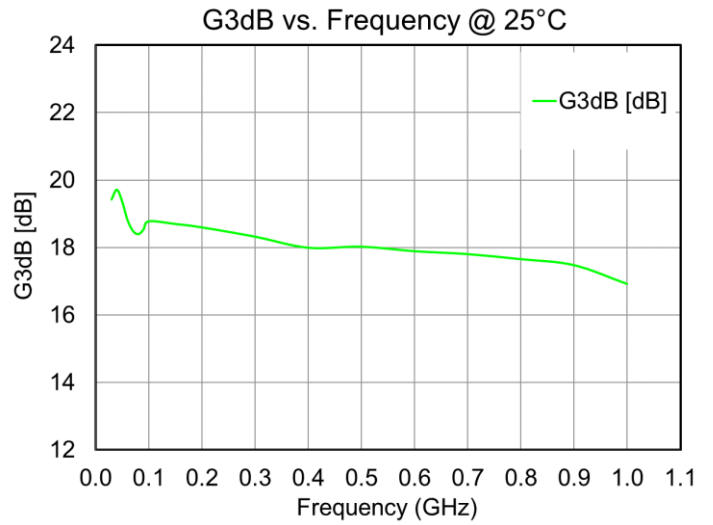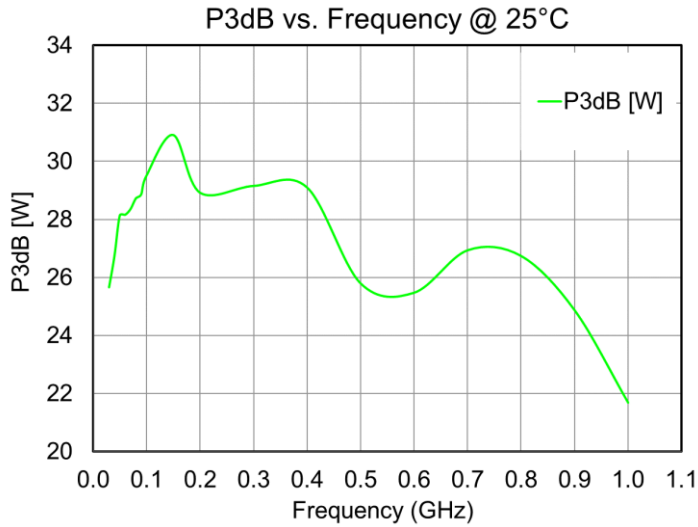


## Two-Tone Performance at 25 °C of 30 – 1000 MHz EVB<sup>1</sup>

Notes:

- 1- Center Frequency = 450 MHz. Tone Separation = 1 MHz.

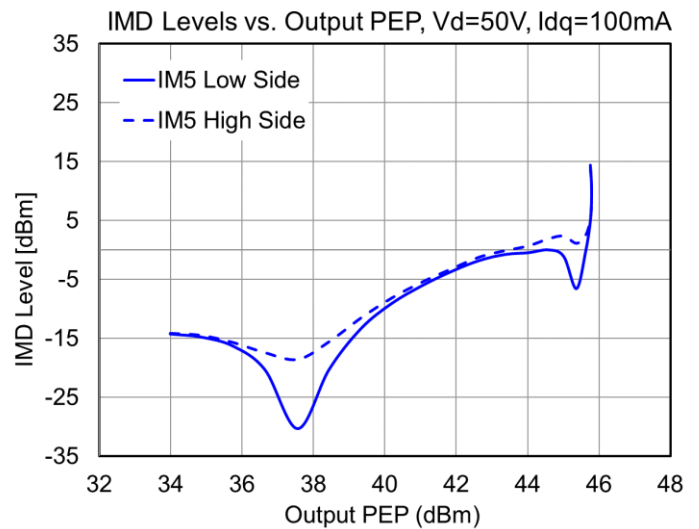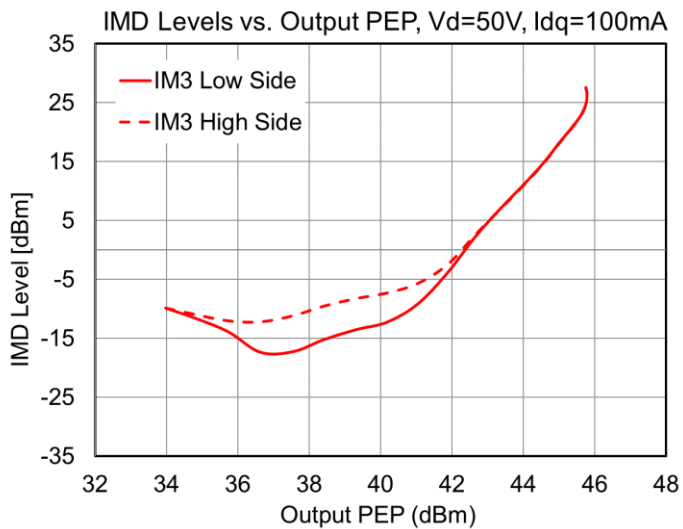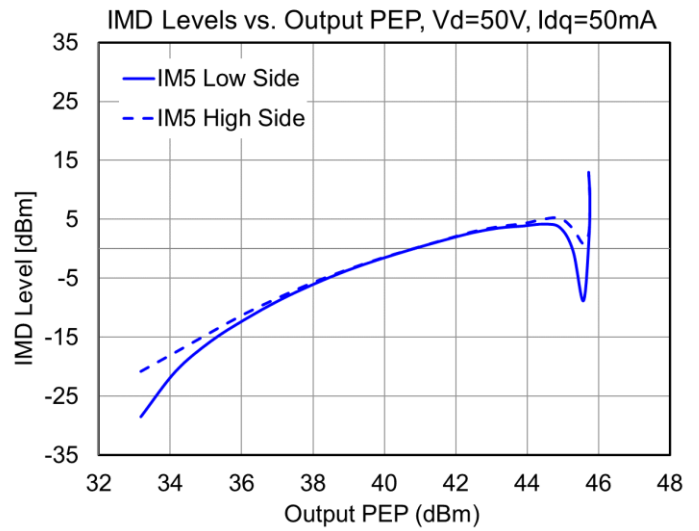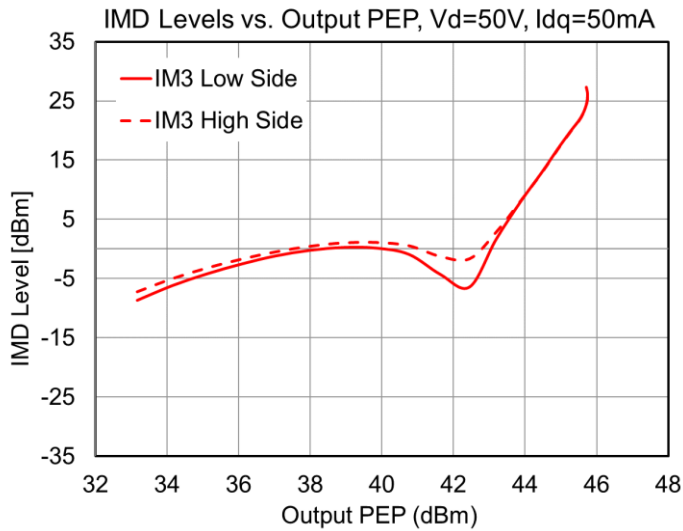

### Pin Layout <sup>1</sup>

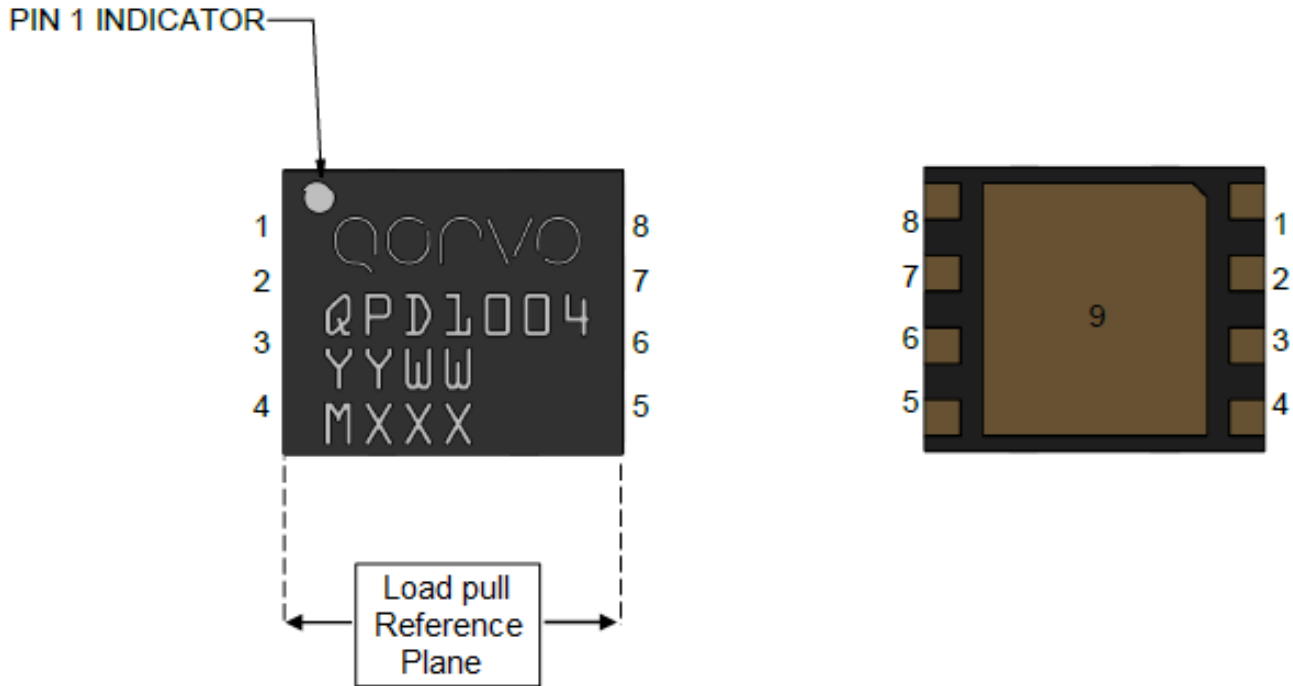


**Notes:**

1. The QPD1004 will be marked with the “QPD1004” designator and a lot code marked below the part designator. The “YY” represents the last two digits of the calendar year the part was manufactured, the “WW” is the work week of the assembly lot start, the “MXXX” is the batch ID.

### Pin Description

Pin	Symbol	Description
1	VG	Gate Voltage
2, 3	RF IN	RF Input (Do not put DC)
4, 5, 8	NC	Not Connected
6, 7	RF OUT / VD	RF Output / Drain voltage
9	GND	Source to be connected to ground

### Mechanical Drawing

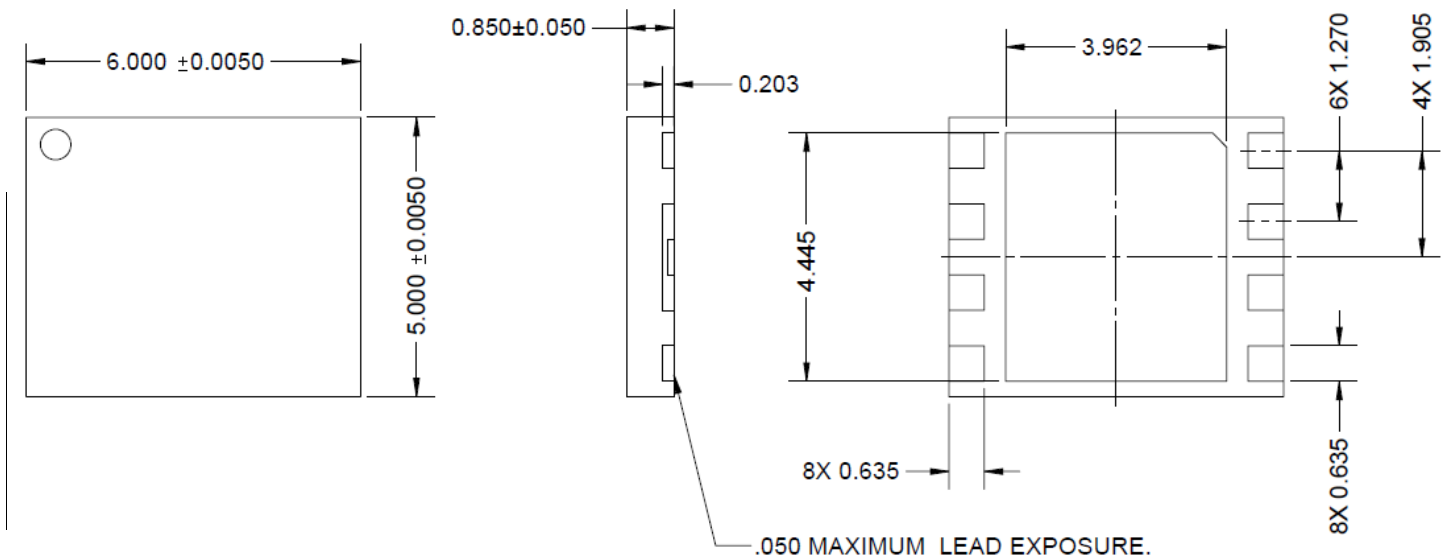

**Notes:**

- 1- All dimensions are in mm, otherwise noted. Tolerance is  $\pm 0.050$  mm.


Bias-up Procedure	Bias-down Procedure
2. Set $V_G$ to -4 V.	3. Turn off RF signal.
4. Set ID current limit to 100 mA.	4. Turn off VD
5. Apply 50 V VD.	5. Wait 2 seconds to allow drain capacitor to discharge
6. Slowly adjust VG until ID is set to 50 mA.	7. Turn off VG
8. Set ID current limit to 1.5 A	
9. Apply RF.	



## PCB Layout – 30 – 1000 MHz EVB<sup>1</sup>

Notes:

- 1- PCB Material is RO4350B, 20 mil thick substrate, 0.5 oz. copper each side.

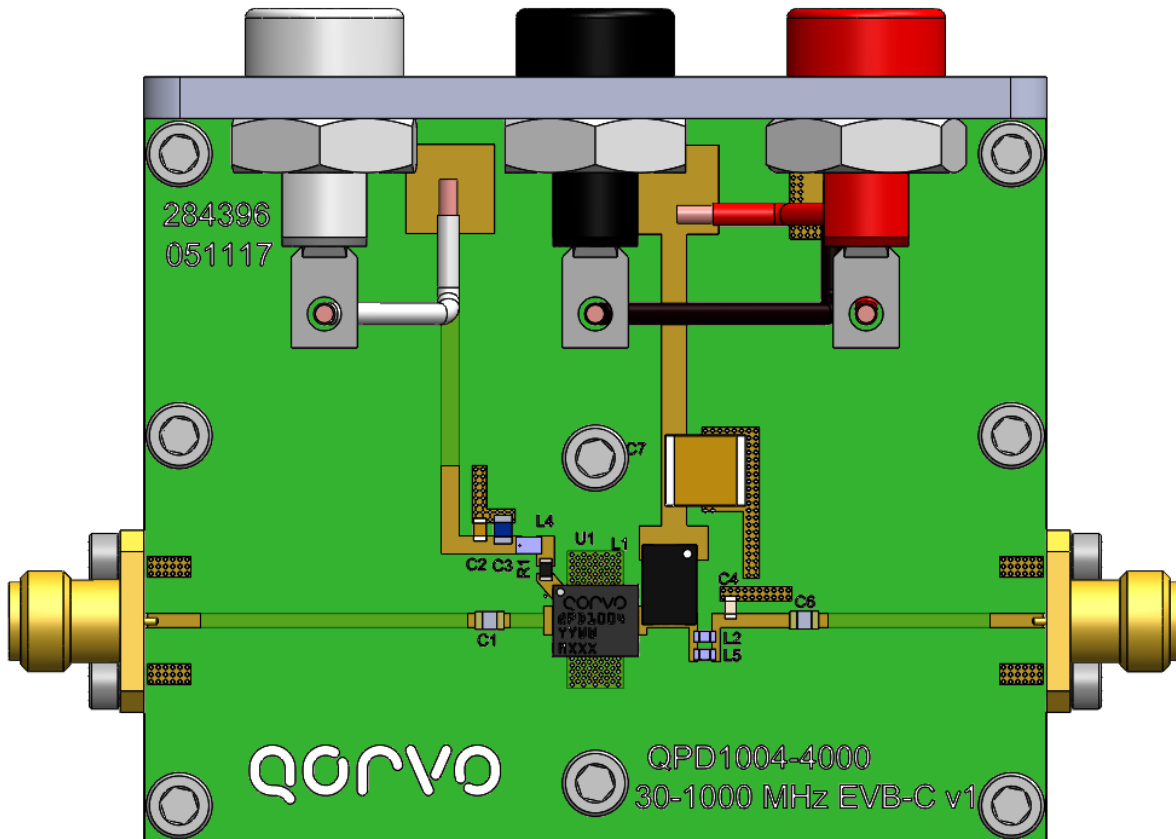




# QPD1004

25W, 50V, 30 – 1200 MHz, GaN RF Input-Matched Transistor

## Bill Of material – 30 – 1000 MHz EVB

Ref Des	Value	Description	Manufacturer	Part Number
C1, C6	2400 pF	X7R 50V 15% 0805 Capacitor	DLI	C08BL242X-5UN-X0T
C2	10 nF	X7R 16V 10% 0603 Capacitor	AVX	0603YC103KAT2A
C3	10 uF	X7R 10V 10% 0805 Capacitor	Murata	GRM21BR71A106KE51L
C4	2.0 pF	C0G 250VDC ± 0.05 pF Capacitor	ATC	600S2R0AT250X
C7	4.7 uF	X7R 100V 10% 2220 Capacitor	Murata	GRM55ER72A475KA01L
L1	0.53 uH	Conical ± 5% 1060 mA Inductor	Coilcraft	BCR-531JLB
L2	15 nH	0603 ± 5% 1.9 A Inductor	Coilcraft	0603HC-15NXJLW
L4	1000 nH	0603 ± 2% 400 mA Inductor	Coilcraft	0603LS-102XGLC
L5	12 nH	0603 ± 5% 1.1 A Inductor	Coilcraft	0603HP-12NXGLW
J1 – J2	–	SMA Panel Mount 4-hole Jack	Gigalane	PSF-S00-000
R1	10 Ohm	0603 1% Thick Film Resistor	TTI Inc	CRCW060310R0JNEA

**Recommended Solder Temperature Profile**

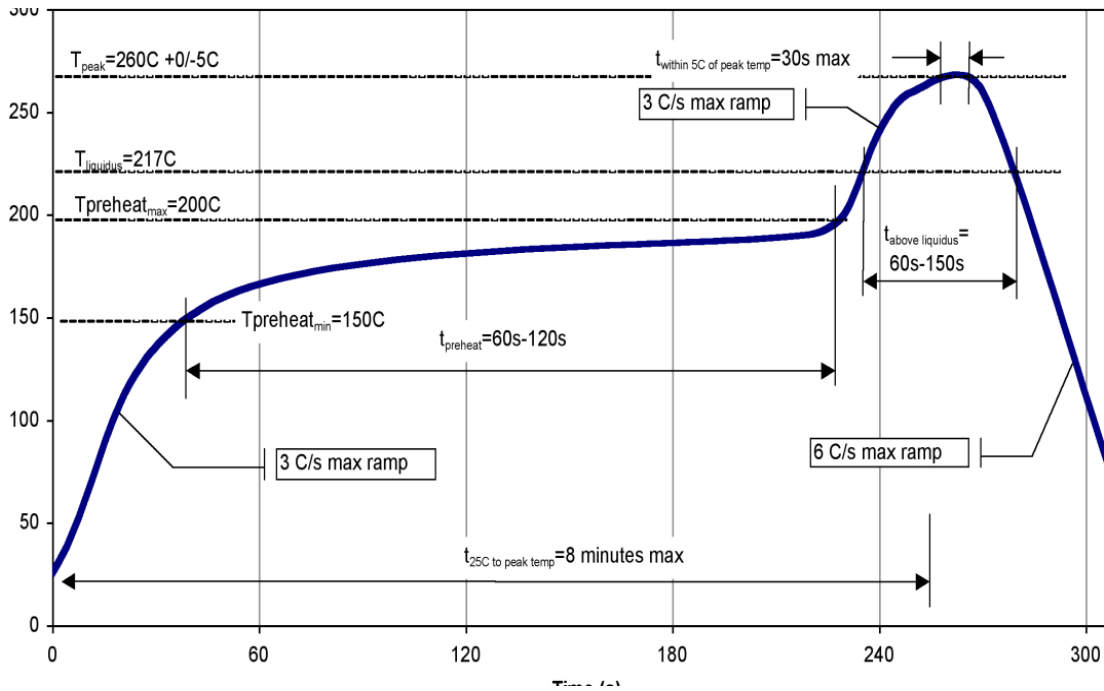

## Product Compliance Information

---

### ESD Sensitivity Ratings



Caution! ESD Sensitive Device

### ESD Rating

ESD Rating: Class 1A  
Value: 300 V  
Test: Human Body Model (HBM)  
Standard: JEDEC Standard JS-001

### MSL Rating

MSL Rating: TBD  
Test: 260 °C convection reflow  
Standard: JEDEC Standard IPC/JEDEC J-STD-020

### Solderability

Compatible with lead free soldering processes, 260 °C maximum reflow temperature.

Package lead plating: NiAu

The use of no-clean solder to avoid washing after soldering is recommended.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

---

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about Qorvo:

**Web:** [www.Qorvo.com](http://www.Qorvo.com) **Tel:** +1.972.994.8465

**Email:** [info-sales@qorvo.com](mailto:info-sales@qorvo.com) **Fax:** +1.972.994.8504

For technical questions and application information: **Email:** [info-products@qorvo.com](mailto:info-products@qorvo.com)

## Important Notice

---

The information contained herein is believed to be reliable. Qorvo makes no warranties regarding the information contained herein. Qorvo assumes no responsibility or liability whatsoever for any of the information contained herein. Qorvo assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[QPD1004SR](#)